


DEWALT®



POWER TOOLS & ACCESSORIES CATALOGUE

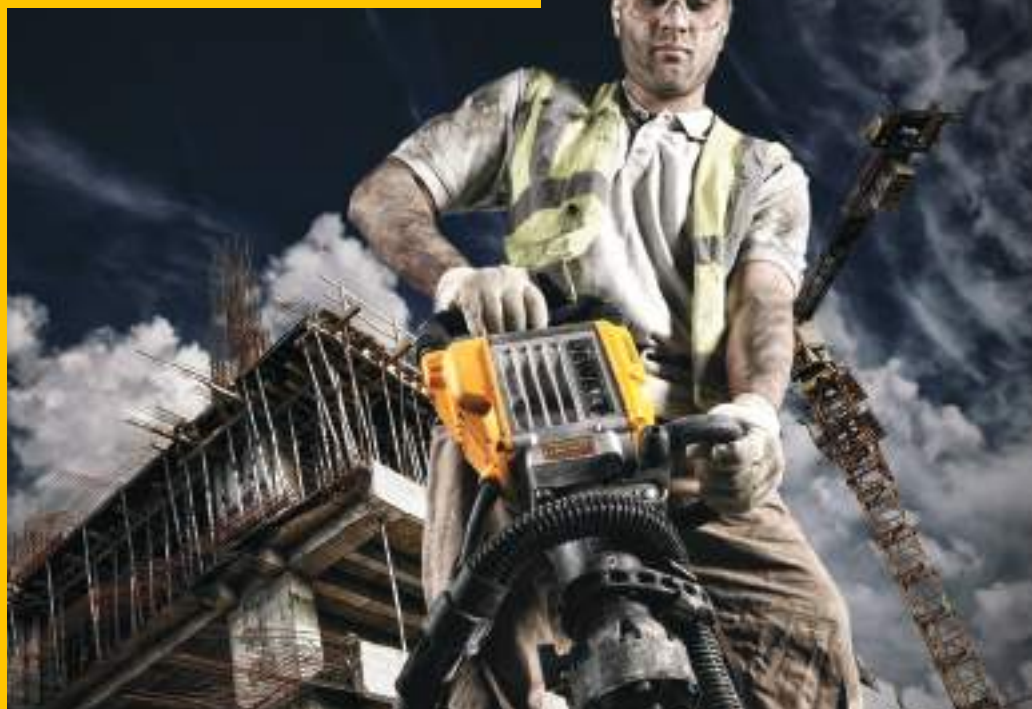

www.DEWALT.com

GUARANTEED TOUGH.®

DEWALT®

Over 30 Years of experience

in engineering professional construction power tools at our in-house facility in Idstein, Germany

Over 50 years of experience

in designing and manufacturing world class drilling solutions for the construction industry at our in-house facility in Buchberg, Germany

- Simulation software developed in partnership with the automotive industry
- Industry leading application-based testing facilities
- Cutting edge drilling accessories manufacture
- Award winning design

In-house design and manufacture ensure that the quality of DEWALT drilling solutions exceeds the requirement of the most demanding professional applications



WHY DEWALT?

END USER RESEARCH

On average, we speak to 20,000 users every year as part of the product development process

A comprehensive understanding of the real applications that our users perform enables us to generate product features that are a genuine benefit to our users

INNOVATIVE PRODUCTS

To support our users and drive our industry forward, DEWALT consistently develop truly innovative products, across multiple categories

This technical strength is regularly recognised by international design awards

COMPLETE PROFESSIONAL QUALITY PRODUCT RANGE

DEWALT is a full range power tool and accessories supplier for the building contractor and professional tradesman

USER LOYALTY

The cast-iron DEWALT guarantee and premium service network ensure that our users have faith in the quality of our products. First time buyers will become loyal DEWALT users

DEWALT is heavily involved in end user events across the globe - building our brand reputation, and generating huge excitement around our diverse product portfolio

XR
LITHIUM ION

BRUSHLESS

**RUNTIME
THAT CANNOT BE
BEATEN**

EVOLUTION OF DEWALT LI-ION CORDLESS DRILLS

Tough tools engineered for extreme environments.

Efficient gearboxes increase runtime and durability. Intelligent electronics module improves performance.

BRUSHLESS MOTORS reduce friction – better runtime and longer tool life. High capacity battery packs offer even longer run-time in a very compact size.



XTREME RUNTIME



BRUSHLESS MOTOR + HIGH CAPACITY BATTERIES

DCD795 18V Hammer Drill Driver, delivers up to 34,000 BPM for fast masonry drilling

All metal chuck delivers improved durability and solid bit grip




2 Speed transmission 0-2000RPM for fast application speed

Intelligent switch module delivers optimum speed control

High capacity battery packs Available as 5.0AH, 4.0AH or new lightweight 2.0AH

Compact size 181mm length

DCD790D2 XR Brushless Compact Drill XR 2.0Ah Battery
BRUSHLESS VS. BRUSHED DRILLS
DCD780C2 Compact Drill XR 1.5Ah Battery



Based on average amount of 30mm screws per charge into softwood

LED Worklight located on base to eliminate chuck shadow

PERFORM PROTECT™

In 2007, DeWALT set itself the challenge of creating the most comprehensive system of the safest, highest performing professional construction tools in the world. This is the Perform & Protect system, made up of products that meet strict criteria in one or more of the following core safety-focused areas: **Vibration; Control; Dust.**

VIBRATION

Vibration exposure can cause a range of conditions collectively known as hand-arm vibration syndrome (HAVS). Other conditions include carpal tunnel syndrome and vibration white finger.

- D25601K**
45mm SDS-Max Combination Hammer
- 50% reduced vibration compared to previous model
 - Floating rear handle
 - Dampened side handle



When the Perform & Protect shield is awarded for VIBRATION, it is guaranteed that Tri-Axial vibration levels have been reduced, increasing usage time without reducing performance.

- DCH254**
18V XR SDS+ Rotary Hammer Drill
- Lowest vibration in class
 - 3 Mode operation



XLR® THE NEW EXTENDED DeWALT® XLR® SERIES...

An optimised head design delivering improved durability and reduced vibration. A 4 flute helix to improve drilling speed through faster debris removal. These features combine to give improved performance and durability in the hardest concrete.



MADE IN GERMANY



DUST
Industry leading dust extraction solutions



CONTROL
Unique and innovative torque control features



VIBRATION
Up to 50% lower vibration

CONTROL



When drilling or cutting there is a chance that the tool could jam. This could cause damage to the tool or cause personal injury. When the Perform & Protect shield is awarded for CONTROL, it is guaranteed that additional innovative torque control safety features have been incorporated into the design of the tool.

- D28136**
Electro-Mechanical clutch reduces the "kickback" transmitted to the operator if the cutting disc jams.



DUST

- DWE46150**
• Collects harmful dust particles during surface grinding applications



Airborne dust inhalation can lead to a number of long-term health conditions such as silicosis and chronic obstructive pulmonary disease (COPD). When the Perform & Protect shield is awarded for DUST, it is guaranteed the potential of inhaling dust is reduced to give a cleaner and safer working environment.

OUR COMPANY

As the brand renowned for the toughness and quality of its Professional Power Tools, DeWALT also offers a wide range of High Performance Accessories. Professional Tradesmen require the highest level of performance in the course of their work and expect a professional quality accessory to enhance the performance of their tools.

As a result of extensive research of our user's requirements, the DeWALT accessory range is designed and developed to withstand even the most demanding conditions. This is due to the exceptional innovation built into the Extreme DeWALT range of products, as well as the end user driven range of high performance products such as XPC jigsaw blades and Extreme saw blades. Other examples of the DeWALT accessory range that feature market leading performance include reciprocating saw blades and high performance bi-metal holesaws and mandrels.

As with DeWALT power tools, DeWALT accessories utilise state-of-the-art technology and computer aided design during the development process backed up by modern test laboratories as well as substantial field test programmes.

85% of all DeWALT Accessories manufactured in-house



EXTREME DeWALT® IMPACT



EXTREME DeWALT® DIAMOND



EXTREME DeWALT® SDS-MAX



EXTREME DeWALT® 2 SDS-PLUS



EXTREME DeWALT® MASONRY



EXTREME DeWALT® COBALT



EXTREME DeWALT® WOOD



EXTREME DeWALT® 2 METAL



EXTREME DeWALT® SDS-PLUS XLR®



XTRA LIFE & RELIABILITY



XTRA PERFORMANCE & CONTROL

MANUFACTURING DRILLING AND SAWING



DeWALT DRILLING SOLUTIONS

DeWALT is a market-leading manufacturer of high performance power tools and accessories that provide a fully integrated drilling system for masonry, metal and wood. Its dedicated accessories factory in Germany was established in 1959 and now employs over 200 people, producing more than 40 million drill bits every year.

MANUFACTURING

To ensure maximum performance and customer satisfaction, DeWALT drill bits undergo the most rigorous manufacturing and testing procedures (including computer controlled milling) and the most advanced production and quality management processes. DeWALT not only produces its own bits, it even designs the machines that make them.

PRODUCT DEVELOPMENT

Through extensive field research, DeWALT has gained a comprehensive knowledge of user needs and applications. Its world-class development facility utilises the latest Catia CAD system and automated test equipment to develop and test all drill bits prior to and during manufacture.

QUALITY CONTROL

DeWALT is a long-standing member of PRUF GEMEINSCHAFT MAUERBOHRER (PGM), an internationally recognised organisation that verifies the suitability of drill bits for use in anchor fixing. To test drill bit life and durability 1 million holes are drilled into 350 tons of concrete each year, this will ensure that if there is any variability in quality it is detected before the products are delivered to the end user. All drill bits are certified to the latest ISO 9001:2000 quality standards as well as being tested using highly scientific machines to ensure their excellent quality.

SAW BLADE MANUFACTURING

More than 70 years of engineering expertise and innovation have been invested in the development of the latest circular saw blades from DeWALT. Manufactured from premium materials, their combination of precision, accuracy, smooth cut finish and durability delivers outstanding performance across a wide range of operations to make them the ideal choice for the professional user.

- The heavy gauge steel used for the blade is hardened, tempered and precision balanced to provide more accurate cutting
- Ultra-sharp cutting edges dramatically reduce splintering and breakout
- Extra hard tungsten carbide teeth remain sharp over longer periods
- Large micro-grain carbide teeth are precision ground so that each individual tooth actually planes the wood to give an exceptionally smooth finish
- Laser cut expansion slots in the blades minimise noise and vibration to ensure an excellent finish to cut surfaces

QUALITY BEGINS AT SHELBYVILLE

To ensure long-lasting performance and user satisfaction DeWALT circular saw blades undergo the most rigorous production and testing procedures at its manufacturing facility in Shelbyville, USA. This advance in process control has been achieved through significant investment and the adoption of Six-Sigma quality management processes.



ICON REFERENCE	10
PRODUCT INDEX.....	11

POWER TOOLS & ATTACHMENTS

CORDLESS

10.8V XR LI-ION	14
Multi Voltage XR LI-ION	16
18V XR LI-ION	17
XR LI-ION Combo Kits	22
XR LI-ION Brushless Combo Kits	24
Batteries and Chargers	26
36V LI-ION	27

CONSTRUCTION INSTRUMENTS

Levelling – Measuring – Detecting	29
Laser Application Chart	30

DRILLING & SCREWDRIVING

TEK Screwdriver	33
Versaclutch Screwdrivers	33
Rotary Drills	33
Mixer Rotary Drill	34
Percussion Drills	34

HAMMERS

SDS Plus Combination Hammer Drills	37
SDS Max Combination Hammer Drills	37
Demolition Hammers	38

DUST EXTRACTION

Drilling Dust Extraction	40
Demolition Dust Extraction	40
Dust Extractor & Attachments	41
Dust Extraction Connection System (AirLock)	41

METALWORKING

Angle Grinders	43
Dust Shrouds	45
Die Grinder	46
Chop Saws	46
Polisher	46

WOODWORKING

Routers	49
Planers	49
Biscuit Joiner	50
Sanders	50
Heat Gun	50

SAWING

Oscillating Multi Tool	53
Jigsaw	53
Circular Saws	53
Reciprocating Saws	54

TOUGH SYSTEM

Modular Storage System & Attachments	57
--------------------------------------------	----

MITRE SAWS

Fixed Head Mitre Saw	59
Sliding Compound Mitre Saws	59
Mitre Saw Workstation & Attachments	60

MACHINERY

Table Saw	63
Rolling Workstations	63
Radial Arm Saw	64
Portable Thicknessers	64

ACCESSORIES

MASONRY DRILLING

EXTREME DeWALT® Masonry Drill Bits	67
EXTREME DeWALT® Masonry Drill Bit Sets	67
Multi-Material Drill Bits	68
SDS-Plus Extreme DeWALT® 2 Drill Bits	68
EXTREME DeWALT® Drill Bit Sets	69
SDS-Plus Chisels	69
EXTREME DeWALT® XLR Full Head Carbide SDS-Plus Drill Bits	70
SDS-Max Drill Bits	71
SDS-Max Chisels	71
19mm Hex Chisels	72
28mm Pavement Breaker Chisels	72
SDS-Plusdrive Adaptors	72

METAL DRILLING

HSS-CO EXTREME DeWALT® Cobalt Drill Bits	73
EXTREME DeWALT® Impact Drill Bits	73
EXTREME DeWALT® 2 Metal Drill Bits	74

WOOD DRILLING

EXTREME DeWALT® Impact Flatwood Drill Bits	75
--------------------------------------------------	----

HOLESAWS

Extreme DeWALT® Impact Holesaws	75
---------------------------------------	----

SCREWDRIVING & FASTENERS

Extreme DeWALT® Impact Screwdriver Bits	76
Screwdriving Adaptors	76

DRILLING SETS

Metal	77
Carbide SDS-Plus & XLR	77

SCREWDRIVING SETS – MIXED78

MAGNETIC SETS & MODULAR CASES

Mag Box Magnetic Sets	79
Modular Accessory Cases	79
Linear Edge	79

IMPACT READY SETS

Extreme DeWALT® Impact Sets	80
Impact Tic Tac Screwdriver Bit Sets	80
Impact Rated Socket Sets	80

PORTABLE CIRCULAR SAW SETS

Cordless Circular Saw Blades	81
Aluminium/Metal Cutting Blades	81
Construction Portable Circular Saw Blades	82
Precision Trim Saw Blades	82

JIGSAW BLADES

XPC Wood Cutting Blades	83
Wood Cutting Blades	83
Metal & Masonry Cutting Blades	84

RECIPROCATING SAW BLADES

Wood Cutting Blades	84
Metal Cutting Blades	85
Drywall Cutting Blades	86

Demolition Blades	86
Reciprocating Saw Blade Sets	86

PLANNER BLADES86

ABRASIVES

Metal Cutting Discs	87
EXTREME Metal Cutting Discs	87

BONDED ABRASIVES

Metal Grinding Discs	88
Chop Saw Wheel – For Metal	88
EXTREME Flap Discs	88

DIAMOND WHEEL

Abrasives	89
Backing Pads	89

POLISHING BONNETS

Angle Grinder Polishing Bonnets	89
---------------------------------------	----

NAILER ACCESSORIES

Nails	90
-------------	----

OSCILLATING TOOLS

Oscillating Tools Accessories	90
-------------------------------------	----

DeWALT SERVICE

Warranty	95
Service Agents	96
Battery Maintenance	97
Service Online (www.2helpu.com)	100

The Icons under each tool indicate the product features



DRILLING/CHISELLING MODES
Single mode for chiselling only



TWO MODE
For rotary and hammer drilling



THREE MODE
For rotary, hammer drilling and chiselling



IMPACT MECHANISM
Uses rotary impacts to generate extremely high torque



TWO AND THREE SPEED SELECTOR
Many DeWALT tools are available with multiple speeds to offer greater control in a variety of applications



CONSTANT SPEED
A constant speed is maintained under operational load



ELECTRONIC VARIABLE SPEED CONTROL
The speed can be adjusted from low to high giving greater control in each application



SOFT START
Electronic soft start to limit start-up current and reduce kick reaction which could misalign the accessory



LOW VIBRATION SIDE HANDLE
Low-Vibration side handle with a damped mechanism



ANTI-MASS
Anti-Mass Counter-balance system helps reduce vibration



SUSPENDED HANDLES
Suspended handles dramatically reduce vibration, increasing productivity and end user comfort.



ANTI-VIBRATION FLOATING HANDLE
No matter where it is pressed, the whole handle is completely dampened from top to bottom reducing the vibration to the user



WET & DRY



3-POSITION KEYLESS SHOE
To maximise blade life



4-POSITION KEYLESS BLADE CLAMP
Allows quick blade change, flush cutting and versatility



PLUNGE ACTION
Parallel plunge action for accuracy and cut finish



GUIDE RAIL COMPATIBLE
Tool can be used with DeWALT guide rail system



CLUTCH
Clutch protects the operator against kick back and the tool against overload should the accessory jam



TOOL FREE ADJUSTMENT
The accessory in use, guard or shoe of the tool can be changed or adjusted without the need of a screwdriver, key or spanner



AIRLOCK
Part of the Airlock system



KEYLESS CHUCK



QUICK CHANGE CHUCK
Ideal solution to change easily between SDS and 3 jaw chuck systems



SPINDLE LOCK
Spindle is locked by pushing a button allowing quick and easy change of accessories



FORWARD AND REVERSE
Forward and reverse action for screwdriving applications



PENDULUM BLADE ACTION
Adjustable pendulum blade action provides improved cutting performance in comparison to a conventional blade action



DUST EXTRACTION
Dust Extraction into either a dust bag on the tool or through an attachment to a dust extraction unit



EASILY ACCESSIBLE BRUSHES
Brushes accessible for easy servicing reducing down time



ELECTRONIC BRUSH WEAR INDICATOR
Service light in the tool handle indicates when the brushes require changing.



DUST EJECTION SYSTEM
Rejects the majority of dust sucked into a grinder leaving clean air only to pass over the motor, resulting in increased durability



HOOK & LOOP
Hook & Loop bases allow easy attachment of sand paper



PALM GRIP
Tool designed for single-handed operation



CORDED/CORDLESS
Tool can be powered by mains electricity source, or by DeWALT batteries



CARRYING CASE
Supplied with heavy duty carrying case



LED
LED lights



NO VOLT RELEASE



TOOL FREE
Tool free accessory change



DRILL DRIVER



HAMMER DRILL DRIVER



1/2" ANVIL



3/8" ANVIL



6.35 HEX

Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page	Cat. No.	Page
1-70-321	57	DCD995N-XE	17	DT1183-QZ	82	DT43540-XE	87	DT6519-QZ	68	DT8090-QZ	71	DT9554-QZ	68
1-70-322	57	DCD995P2-XE	17	DT1184-QZ	82	DT4762-QZ	75	DT6520-QZ	68	DT8091-QZ	71	DT9557-QZ	68
1-70-323	57	DCF610S2-XE	14	DT1207-QZ	81	DT4763-QZ	75	DT6522-QZ	68	DT8253-QZ	75	DT9560-QZ	68
1-70-324	57	DCF813N-XE	14	DT1212-QZ	81	DT4764-QZ	75	DT6523-QZ	68	DT8254-QZ	75	DT9566-QZ	68
1-70-349	57	DCF813S2-XE	14	DT1214-QZ	82	DT4765-QZ	75	DT6524-QZ	68	DT8255-QZ	75	DT9567-QZ	68
1-70-362	57	DCF815N-XE	14	DT1215-QZ	82	DT4766-QZ	75	DT6525-QZ	68	DT8256-QZ	75	DT9579-QZ	69
D21520-XE	34	DCF815S2-XE	14	DT1216-QZ	82	DT4767-QZ	75	DT6526-QZ	68	DT8257-QZ	75	DT9581-QZ	69
DT1810KS-XE	34	DCF880M2-XE	19	DT2049-QZ	83	DT4768-QZ	75	DT6528-QZ	68	DT8258-QZ	75	DT9582-QZ	69
DT1815KS-XE	34	DCF880N-XE	19	DT2051-QZ	83	DT4769-QZ	75	DT6529-QZ	68	DT8259-QZ	75	DT9585-QZ	69
D25013K-XE	37	DCF885C2-XE	19	DT2053-QZ	83	DT4770-QZ	75	DT6530-QZ	68	DT8907-QZ	70	DT9587-QZ	69
D250521-XJ	37	DCF885M2-XE	19	DT2057-QZ	83	DT4771-QZ	75	DT6531-QZ	68	DT8908-QZ	70	DT9589-QZ	69
D25124K-XE	37	DCF885N-XE	19	DT20700-QZ	90, 93	DT4772-QZ	75	DT6533-QZ	68	DT8909-QZ	70	DT9590-QZ	69
D25301D-XJ	40	DCF886M2-XE	19	DT20701-QZ	90, 93	DT4773-QZ	75	DT6671-QZ	67	DT8910-QZ	70	DT9597-QZ	69
D25302DH-XJ	27, 40	DCF886N-XE	19	DT20702-QZ	90, 93	DT4774-QZ	75	DT6672-QZ	67	DT8911-QZ	70	DT9598-QZ	69
D253241-XJ	37	DCF889M2-XE	19	DT20703-QZ	90, 93	DT4775-QZ	75	DT6675-QZ	67	DT8912-QZ	70	DT9599-QZ	69
D25414KT-XE	37	DCF889N-XE	19	DT20704-QZ	90, 93	DT4776-QZ	75	DT6677-QZ	67	DT8913-QZ	70	DT9602-QZ	69
D25601K-XE	37	DCF895M2-XE	18	DT20705-QZ	90, 93	DT4777-QZ	75	DT6679-QZ	67	DT8914-QZ	70	DT9604-QZ	69
D25722K-XE	37	DCF895N-XE	18	DT20706-QZ	90, 93	DT4778-QZ	75	DT6680-QZ	67	DT8916-QZ	70	DT9609-QZ	69
D25902K-XE	38	DCG412M2-XE	20	DT20707-QZ	90, 93	DT5034-QZ	74	DT6682-QZ	67	DT8917-QZ	70	DT9611-QZ	69
D25941K-XE	38	DCG412N-XE	20	DT20708-QZ	90, 93	DT5035-QZ	74	DT6683-QZ	67	DT8918-QZ	70	DT9613-QZ	69
D25961K-XE	38	DCH254M2-XE	17	DT20709-QZ	90, 93	DT5036-QZ	74	DT6684-QZ	67	DT8920-QZ	70	DT9616-QZ	69
D25980-XE	38	DCH254N-XE	17	DT20710-QZ	90, 93	DT5037-QZ	74	DT6685-QZ	67	DT8921-QZ	70	DT9700-QZ	69, 77
D259801-XJ	38	DCH364M2-XE	27	DT20711-QZ	90, 93	DT5038-QZ	74	DT6686-QZ	67	DT8922-QZ	70	DT9701-QZ	69, 77
D26204K-XE	49	DCK211D2T-XE	22	DT20712-QZ	91, 92, 93	DT5039-QZ	74	DT6687-QZ	67	DT8923-QZ	70	DT9901-QZ	90
D26414K-XE	50	DCK250D2-XE	24	DT20713-QZ	90, 93	DT5041-QZ	74	DT6688-QZ	67	DT8924-QZ	70	DT9903-QZ	90
D26441K-XE	50	DCK250M2-XE	24	DT20714-QZ	90, 93	DT5042-QZ	74	DT6689-QZ	67	DT8925-QZ	70	DT9904-QZ	90
D26453K-XE	50	DCK250P2-XE	24	DT20715-QZ	90, 93	DT5043-QZ	74	DT6690-QZ	67	DT8927-QZ	70	DW03050-XJ	29, 30
D26500K-XE	49	DCK255M2-XE	24	DT20716-QZ	90, 93	DT5044-QZ	74	DT6691-QZ	67	DT8928-QZ	70	DW03101-XJ	29, 30
DT27905BC-XJ	31, 41	DCK255P2-XE	24	DT20717-QZ	90, 93	DT5046-QZ	74	DT6692-QZ	67	DT8929-QZ	70	DW03220-XE	81
D28065-XE	44	DCK263M2-XE	24	DT20718-QZ	90, 93	DT5047-QZ	74	DT6801-QZ	69	DT8930-QZ	70	DW03240-XE	81
D28113-XE	43	DCK280C2-XE	22	DT20719-QZ	91, 92, 93	DT5048-QZ	74	DT6802-QZ	69	DT8932-QZ	70	DW088N-XE	29, 30
D28114N-XE	44	DCK285C2-XE	22	DT2085-QZ	84	DT5049-QZ	74	DT6803-QZ	69	DT8933-QZ	70	DW089N-XE	29, 30
D28135-XE	44	DCK285M2-XE	22	DT2160-QZ	84	DT5050-QZ	74	DT6806-QZ	69	DT8934-QZ	70	DW1263 G	77
D28136-XE	44	DCK290M2-XE	22	DT2161-QZ	84	DT5051-QZ	74	DT6820-QZ	71	DT8935-QZ	70	DW1361	77
D28492K-XE	45	DCK295M2-XE	22	DT2162-QZ	84	DT5052-QZ	74	DT6822-QZ	71	DT8937-QZ	70	DW1369	77
D28710-XE	46	DCK450P2-XE	25	DT2165-QZ	83	DT5053-QZ	74	DT6824-QZ	71	DT8978-QZ	70	DW2002825	78
D28715-XE	46	DCK490M2-XE	23	DT2167-QZ	83	DT5054-QZ	74	DT6826-QZ	71	DT91281-QZ	79	DW2097	78
DC415P-XE	27	DCK653P3-XE	25	DT2168-QZ	83	DT5055-QZ	74	DT6830-QZ	72	DT9400-QZ	71	DW2174	78
DC800M2-XE	27	DCK693M3-XE	23	DT2169-QZ	83	DT5056-QZ	74	DT6834-QZ	71	DT9401-QZ	71	DW2176	78
DC9000-XE	26	DCL040-XE	21	DT2211-QZ	83	DT5057-QZ	74	DT6927-QZ	72	DT9403-QZ	71	DW2180	78
DC9071-XE	26	DCL050-XE	21	DT2213-QZ	83	DT5058-QZ	74	DT6929-QZ	72	DT9404-QZ	71	DW236-XE	33
DC9091-XE	26	DCL510-XE	15	DT2300L-QZ	86	DT5059-QZ	74	DT6934-QZ	72	DT9409-QZ	71	DW2520F	78
DC9096-XE	26	DCN6901-XJ	20	DT2308L-QZ	86	DT5060-QZ	74	DT6940-QZ	72	DT9410-QZ	71	DW266-XE	33
DC9180-XE	26	DCN690M2-XE	20	DT2314L-QZ	86	DT50600-QZ	73	DT6942-QZ	72	DT9411-QZ	71	DW268-XE	33
DC9310-XE	26	DCN690N-XE	20	DT2440-QZ	86	DT50601-QZ	73	DT6947-QZ	72	DT9412-QZ	71	DW269-XE	33
DC8090-XJ	16	DCN692P2-XE	20	DT30601-QZ	88	DT50603-QZ	73	DT6948-QZ	72	DT9416-QZ	71	DW3044PK-XE	54
DCB100-XE	26	DCR017-XE	16, 26	DT30602-QZ	88	DT50605-QZ	73	DT7030-QZ	72	DT9417-QZ	71	DW3111K-XE	54
DCB102-XE	26	DCR019-XE	16	DT30603-QZ	88	DT50607-QZ	73	DT705018-QZ	80	DT9422-QZ	71	DW3123	82
DCB105-XE	26	DCS310N-XE	14	DT30611-QZ	88	DT50608-QZ	73	DT705028-QZ	80	DT9423-QZ	71	DW3173A	82
DCB119-XE	26	DCS310S2-XE	14	DT30612-QZ	88	DT50609-QZ	73	DT705038-QZ	80	DT9433-QZ	71	DW3184A	82
DCB123-XE	26	DCS331N-XE	20	DT30613-QZ	88	DT5061-QZ	74	DT70526	80	DT9435-QZ	71	DW3188A	82
DCB182-XE	26	DCS355D2-XE	19	DT30621-QZ	88	DT50610-QZ	73	DT7386-QZ	76	DT9442-QZ	71	DW3311K-XE	53
DCB183-XE	26	DCS355M2-XE	19	DT30622-QZ	88	DT50613-QZ	73	DT7387-QZ	76	DT9444-QZ	71	DW3762-S	84
DCB184-XE	26	DCS355N-XE	19	DT30623-QZ	88	DT50614-QZ	73	DT7390-QZ	76	DT9445-QZ	71	DW3768-S	84
DCB360-XE	26	DCS373N-XE	21	DT3090-QZ	92	DT50616-QZ	73	DT7391-QZ	76	DT9504-QZ	68	DW3770-S	84
DCB361-XE	26	DCS380N-XE	20	DT3091-QZ	92	DT50618-QZ	73	DT7507-QZ	80	DT9507-QZ	68	DW902M-XE	31, 41
DCD710N-XE	14	DCS391N-XE	21	DT3092-QZ	92	DT50619-Q	73	DT7508-QZ	76	DT9506-QZ	68	DW9110-XJ	31, 41
DCD710S2-XE	14	DCI410S1-XE	15	DT3093-QZ	92	DT5062-QZ	74	DT7512-QZ	76	DT9508-QZ	68	DW3791	79, 83
DCD740M-XE	18	DCI414S1-XE	15	DT3094-QZ	92	DT5040-QZ	72	DT79208-QZ	77	DT9509-QZ	68	DW4541A-XE	88
DCD776C2-XE	18	DCI416S1-XE	15	DT3095-QZ	92	DT5405-QZ	73	DT79218-QZ	78	DT9514-QZ	68	DW4543A-XE	88
DCD780C2-XE	18	DCV5801H-XJ	16	DT3567-QZ	89	DT5409-QZ	73	DT7926-XJ	77	DT9515-QZ	68	DW4547A-XE	88
DCD785C2-XE	17	DCV582-XE	16	DT3568-QZ	89	DT5412-QZ	73	DT79288-QZ	67, 78	DT9516-QZ	68	DW4549A-XE	88
DCD785M2-XE	17	DE0881-XE	29	DT3569-QZ	89	DT5414-QZ	73	DT79368-QZ	78	DT9519-QZ	68	DW4802	84
DCD785N-XE	17	DE0892-XE	29	DT3622-QZ	89	DT5415-QZ	73	DT79378-QZ	77	DT9520-QZ	68	DW4803	84
DCD790M-XE	18	DE7027-XJ	60	DT3901-QZ	86	DT5416-QZ	73	DT79388-QZ	78	DT9521-QZ	68	DW4804	84
DCD795D2-XE	17	DE7400-XJ	63	DT3906-QZ	86	DT5417-QZ	73	DT7969-QZ	78	DT9525-QZ	68	DW4806	84
DCD795M2-XE	17	DE7901-XJ	41	DT4286-QZ	82	DT5419-QZ	73	DT7993-QZ	76	DT9528-QZ	68	DW4807	85
DCD795N-XE	17	DT1040-QZ	82	DT43140-XE	87	DT5422-QZ	73	DT7994-QZ	76	DT9529-QZ	68	DW4808	85
DCD795P2-XE	17	DT1041-QZ	82	DT4321-QZ	87	DT5426-QZ	73	DT7995-QZ	76	DT9540-QZ	68	DW4809	85
DCD985M2-XE	17	DT1042-QZ	82	DT43240-XE	87	DT5427-QZ	73	DT7997-QZ	76	DT9541-QZ	68	DW4811	85
DCD985N-XE	17	DT1043-QZ	82	DT43340-XE	87	DT6517-QZ	68	DT7998-QZ	76	DT9552-QZ	68	DW4813	85
DCD995M2-XE	17	DT1182-QZ	82	DT4354-QZ	82	DT6518-QZ	68	DT7999-QZ	76	DT9553-QZ	68	DW4849	84

THE CORDLESS XR RANGE



1.3 AH **1.5 AH** **2.0 AH** **4.0 AH** **5.0 AH**

10.8V
LITHIUM ION


14.4V
LITHIUM ION

18V
LITHIUM ION

The majority of products shown are available within ANZ.

10.8V XR Li-Ion Compact Drill Driver

DCD710S2-XE/DCD710N-XE*



10.8V XR Li-Ion compact drill driver featuring XR 1.5Ah Li-Ion battery technology
15 Position adjustable torque control for consistent screw driving into a variety of materials with different screw sizes
Ergonomic handle and rubber overmould to provide ultimate end user comfort
Parabolic switch profile allowing for greater control over speed of application


Standard Equipment: 2 x 1.5Ah XR Li-Ion battery packs, 10.8V XR charger, Belt hook, Heavy duty kit bag

Battery Capacity	1.5 Ah
Power Output	180 Watt
No Load Speed	0-400/1500 rpm
Chuck Capacity	1.5-10 mm
Max Torque	24 Nm
Max. Drilling Capacity [Wood]	19 mm
Max. Drilling Capacity [Metal]	10 mm
Weight	1.1 kg
Length x Height	185 x 195 mm

* Available as bare unit, without batteries, bag and charger as N version

10.8V XR Li-Ion Compact Impact Driver

DCF815S2-XE/DCF815N-XE*



Compact, durable design delivers 107Nm of torque
Parabolic switch profile allowing for greater control over speed
6.35mm 'drop in' keyless hex driver allows for quick, one handed fitment
3 LED 'Halo' ring provides maximum illumination to work piece


Standard Equipment: 2 x 1.5Ah XR Li-Ion battery packs, 10.8V XR charger, Belt hook, Heavy duty kit bag

Battery Capacity	1.5 Ah
Max Torque	107 Nm
Power Output	147 Watt
No Load Speed	0-2450 rpm
Impacts per Minute	3400 ipm
Max. Bolt Diameter	M10
Bit Holder	1/4" (6.35mm)
Weight	1.04 kg
Length x Height	158 x 195 mm

* Available as bare unit, without batteries, bag and charger as N version

10.8V XR Li-Ion Compact Impact Wrench

DCF813S2-XE/DCF813N-XE*



Compact body enables operation in confined spaces and repetitive use with minimal fatigue
3 LED 'Halo' ring provides maximum illumination to work piece
Parabolic switch profile allowing for greater control over speed
Ergonomic handle and rubber overmold reduces surface vibration and user fatigue


Standard Equipment: 2 x 1.5 Ah XR Li-Ion battery packs, 10.8V XR charger, Belt hook, Heavy duty kit bag

Battery Capacity	1.5 Ah
Max. Torque	130 Nm
Power Output	147 Watt
No Load Speed	0-2450 rpm
Impacts per Minute	3400 ipm
Max. Bolt Diameter	M12
Bit Holder	3/8" Anvil
Weight	1.04 kg
Length x Height	158 x 195 mm

* Available as bare unit, without batteries, bag and charger as N version

10.8V XR Li-Ion Compact Screwdriver

DCF610S2-XE




Powerful 10.8V Screwdriver for screwdriving & drilling applications
15 Position adjustable torque control for consistent screwdriving into a variety of materials with different screw sizes
6.35mm 'drop in' keyless hex driver allows for quick, one handed fitment
3 LED 'Halo' ring provides maximum illumination to work piece

Standard Equipment: 2 x 1.5Ah XR Li-Ion battery packs, 10.8V XR charger, Belt hook, Heavy duty kit bag

Battery Capacity	1.5 Ah
Max Torque	8 Nm
Power Output	154 Watt
No Load Speed	0-1050 rpm
Bit Holder	6.35mm
Weight	0.96 kg
Length x Height	158 x 190 mm

10.8V XR Li-Ion Compact Reciprocating Saw

DCS310S2-XE/DCS310N-XE*



Adjustable three position pivoting handle provides user with flexibility to work in confined spaces
Compact and lightweight design
Ergonomic handle and rubber overmould provide ultimate end user comfort
Lever action keyless blade clamp for quick and easy blade change


Standard Equipment: 2 x 1.5Ah XR Li-Ion battery packs, 10.8V XR charger, Heavy duty kit bag

Battery Capacity	1.5 Ah
Power Output	140 Watt
No Load Stroke Rate	0-2,700 spm
Stroke Length	14 mm
Weight	1.4 kg
Length x Height	255 x 230 mm

* Available as bare unit, without batteries, kit bag and charger as N version

10.8V XR Li-Ion Inspection Camera With 17mm Cable

DCT410S1-XE




Removable wireless screen for ease of viewing when in tight areas
Photo and video capturing on Micro SD card to help with documentation
Hook and magnet accessories included to aid in retrieval
3x zoom capability for better visibility

Standard Equipment: 1 x 1.5Ah XR Li-Ion battery pack, 10.8V XR charger, Hook attachment, Magnet attachment, Micro SD Card, Camera cable, Heavy duty kit box

Battery Capacity	1.5 Ah
Display Type	LCD
Resolution	320 x 480 dpi
Data Storage	2GB Micro SD Card
Cable Length	900 mm
Cable Diameter	17 mm
Waterproof cable	Yes
Screen Size	89 mm
Zoom	3 x
Weight	1.0 kg

10.8V XR Li-Ion Infrared Thermometer

DCT414S1-XE




Non-contact temperature measurements (-29°C to 500°C) for ease of use over long distances to produce accurate readings
LED hot (red) & cold (blue) indicator for visual and/or audio alarm for quickly locating trouble areas
Micro SD card for recording max, min, and average temperatures
Adjustable emissivity for improved accuracy across a wide range of materials

Standard Equipment: 1 x 1.5Ah XR Li-Ion battery pack, 10.8V XR charger, Heavy duty kit box

Battery Capacity	1.5 Ah
Display Type	LED
Screen Size	36 mm
Field of View	30cm x 2.5cm
Adjustable Emissivity	0.1 to 1.0
Operating Temperature	-10°C to 50°C
Temperature Range	-29°C to 500°C
Accuracy	± 1.5°C or ± 1.5%, whichever is greater °
Weight	0.5 kg

10.8V XR Li-Ion Imaging Thermometer

DCT416S1-XE




Patented imaging thermometer technology measures and displays temperature patterns
Non-contact temperature measurement over a range of -10°C to 250°C
Visual and thermal images can be blended to easily locate and identify faults
Adjustable emissivity improves accuracy across a wide range of materials

Standard Equipment: 1 x 1.5Ah XR Li-Ion battery pack, 10.8V XR charger, Micro SD card, Heavy duty kit box

Battery Capacity	1.5 Ah
Display Type	LCD
Resolution	225 dpi
Data Storage	2GB Micro SD Card
Screen Size	56 mm
Field of View	100cm x 2.5cm
Adjustable Emissivity	0.1 to 1.0
Operating Temperature	-5°C to 45°C
Temperature Range	-10°C to 250°C
Accuracy	Below 100°C ± 2°C, above 100°C ± 2% of reading °
Weight	0.56 kg

10.8V XR Li-Ion Compact LED Flashlight

DCL510-XE




Flashlight has belt clip, magnetic mount or can be free standing.
Flashlight head can rotate 180° horizontally and 180° vertically with ratchet lock
Compact, lightweight design with impact resistant housing

Standard Equipment: Battery & charger sold separately


Bulb Type	LED
Lumen Output	130 Lm
Height x Length	123 x 52 mm
Weight (incl. battery)	0.35 kg

MAG BOX



The DeWALT magbox range is a range of magnetic accessory box sets providing flexible storage solutions that fit most common accessories. The magnetic feature allows, where possible, the sets to be accessed hands free when adhered to any metal surface. All sets feature:

- High strength magnets and built in hooks for increased functionality
- High impact materials for optimum durability
- Compact design for easy storage and portability



XR Li-Ion DAB+/FM Radio Charger

NEW

DCR017-XE



DAB+ and FM tuner receives digital and analogue signal
Multi-voltage XR charger with charge indicator LED light
Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries
Two AC power outlets offer more versatility for jobsite power
Tech Box provides device protection and storage
3.5mm auxiliary port allows for connection to portable audio devices

Standard Equipment: Battery sold separately

Radio Power Source	AC/DC
Radio Frequencies	DAB(+)/FM
Charging Time	45-120 min
Length x Height	420 x 310 mm
Weight	5.9 kg



XR Li-Ion FM/AM Radio

NEW

DCR019-XE



FM/AM tuner receives analogue signal
Accepts 10.8V, 14.4V and 18V XR Li-Ion batteries
3.5mm auxiliary port allows for connection to portable audio devices
Blow moulded roll cage for maximum durability

Standard Equipment: Battery & charger sold separately

Radio Power Source	AC/DC
Radio Frequencies	FM/AM
Length x Height	240 x 245 mm
Weight	2.8 kg



XR Li-Ion AC/DC Wet & Dry Vacuum

NEW

DCV582-XE



Accepts 14.4V and 18V XR Li-Ion batteries
High efficiency washable HEPA filter.
Traps 99.97% of Dust as fine as 0.3 microns
Wet & dry operation

Standard Equipment: 2 meter hose, crevice tool, wide nozzle, filter. Battery & charger sold separately.



Replacement filter available: DCV5801H-XJ



USB Charging XR Battery Adapter

NEW

DCB090-XJ



Transforms your XR battery into a portable charger
Two USB outlets allow charging of wide range of small electronic devices
Multi-voltage - compatible with 10.8V, 14.4V and 18V XR battery packs
Bright and highly visible state of charge indicator

Standard Equipment: Battery & charger sold separately

Charging current	1.5 A (total)
Height x Length	39 x 97 mm
Weight	0.094 kg



18V XR Li-Ion Heavy Duty SDS Plus 3 Mode Dedicated Hammer with Quick Change Chuck

NEW

DCH254M2-XE/DCH254N-XE*



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 24mm
Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal
Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Multi-position side handle, Quick release SDS-Plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kit box



18V XR Li-Ion XRP Brushless 3 Speed Hammer Drill Driver

NEW

DCD995P2-XE/DCD995M2-XE/DCD995N-XE*



Brushless Motor Technology for excellent efficiency and Extreme Runtime
Tough 3 speed all metal transmission for increased runtime and longer tool life
Electronic Clutch with 11 position adjustable torque control for optimised precision when screw driving

Standard Equipment: 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty TSTAK kit box



18V XR Li-Ion XRP 3 Speed Hammer Drill Driver

DCD985M2-XE/DCD985N-XE*



Tough 3 speed all metal transmission for increased runtime and longer tool life
Clutch with 22 position adjustable torque control for optimised precision when screw driving
13 mm ratcheting keyless chuck with automatic spindle lock for fast bit changes

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Multi position side handle, Heavy duty kit box



18V XR Li-Ion Brushless 2 Speed Hammer Drill Driver

NEW

DCD795P2-XE/DCD795M2-XE/DCD795D2-XE/DCD795N-XE*



Brushless Motor Technology for excellent efficiency and Extreme Runtime
Ultra compact, lightweight design allows use in confined spaces
Two speed all metal transmission for increased runtime and longer tool life

Standard Equipment: 2 x 5.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kit box



18V XR Li-Ion 2 Speed Hammer Drill Driver

DCD785M2-XE/DCD785C2-XE/DCD785N-XE



Ultra compact, lightweight design allows use in confined spaces
Two speed all metal transmission for increased runtime and longer tool life
13mm ratcheting chuck with automatic spindle lock for fast bit changes

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kit box



Battery Capacity	4.0 Ah
Power Output	400 Watt
No Load Speed	0-1200 rpm
Impact energy (EPTA 05/2009)	2.1 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	26 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concrete]	24 mm
Weight	3.2 kg
Length x Height	328 x 202 mm
Hand/Arm Vibration - Drilling	6.6 m/s²

* Available as bare unit, without batteries, kit box and charger as N version

Battery Capacity	5.0 Ah
Max Torque	80 Nm
Power Output	650 Watt
No Load Speed	0-450/1300/2000 rpm
Beats per Minute	0-7650/22100/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	50 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	16 mm
Weight	2.13 kg
Length x Height	213 x 205 mm

* Table reflects P2 version, M2 version shipped with 4.0Ah battery packs. Available as bare unit, without batteries, kit box and charger as N version

Battery Capacity	4.0 Ah
Max Torque	80 Nm
Power Output	500 Watt
No Load Speed	0-575/1300/2000 rpm
Beats per Minute	0-9755/22950/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	50 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	16 mm
Weight	2.42 kg
Length x Height	238 x 250 mm

* Available as bare unit, without batteries, kit box and charger as N version

Battery Capacity	5.0 Ah
Max Torque	60 Nm
Power Output	360 Watt
No Load Speed	0-600/2000 rpm
Beats per Minute	0-10200/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.88 kg
Length x Height	197 x 218 mm

* Table reflects P2 version, M2 version shipped with 4.0Ah battery packs, D2 version shipped with 2.0Ah battery packs. Available as bare unit, without batteries, kit box and charger as N version


Battery Capacity	4.0 Ah
Max Torque	60 Nm
Power Output	350 Watt
No Load Speed	0-600/2000 rpm
Beats per Minute	0-10200/34000 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	38 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.88 kg
Length x Height	202 x 236 mm

* Table reflects M2 version, C2 version shipped with 1.5Ah battery packs. Available as bare unit, without batteries, kit box and charger as N version

18V XR Li-Ion 2 Speed Hammer Drill Driver

NEW

DCD776C2-XE



Ultra compact, lightweight design allows use in confined spaces
Two speed all metal transmission for increased runtime and longer tool life
13mm ratcheting chuck with automatic spindle lock for fast bit changes

Standard Equipment: 2 x 1.3Ah XR Li-Ion battery packs, Multi-voltage XR charger, Heavy duty kit box

Battery Capacity	1.3 Ah
Max Torque	42 Nm
Power Output	300 Watt
No Load Speed	0-450/1500 rpm
Beats per Minute	0-7650/25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity (Wood)	25 mm
Max. Drilling Capacity (Metal)	13 mm
Max. Drilling Capacity (Masonry)	13 mm
Weight	1.34 kg
Length x Height	228 x 191 mm

XR

18V

13mm


2 SPEED

LED

18V XR Li-Ion Brushless 2 Speed Drill Driver

NEW

DCD790N-XE



Brushless Motor Technology for excellent efficiency and Extreme Runtime
Ultra compact, lightweight design allows use in confined spaces
Two speed all metal transmission for increased runtime and longer tool life

Standard Equipment: Battery and Charger Sold Separately

Max Torque	60 Nm
Power Output	360 Watt
No Load Speed	0-600/2000 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity (Wood)	38 mm
Max. Drilling Capacity (Metal)	13 mm
Weight	1.24 kg
Length x Height	181 x 218 mm

XR

18V

BRUSHLESS

13mm


2 SPEED

LED

18V XR Li-Ion 2 Speed Drill Driver

NEW

DCD780C2-XE



Ultra compact, lightweight design allows use in confined spaces
Two speed all metal transmission for increased runtime and longer tool life
13mm ratcheting chuck with automatic spindle lock for fast bit changes

Standard Equipment: 2 x 1.5Ah XR Li-Ion battery packs, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kit box

Battery Capacity	1.5 Ah
Max Torque	60 Nm
Power Output	350 Watt
No Load Speed	0-600/2000 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity (Wood)	38 mm
Max. Drilling Capacity (Metal)	13 mm
Weight	1.55 kg
Length x Height	190 x 218 mm

XR

18V

13mm


2 SPEED

LED

18V XR Li-Ion 2 Speed Right Angle Drill Driver

NEW

DCD740N-XE



NEW XR Li-Ion battery technology
Two speed settings with reverse switch
Compact 10mm single sleeve keyless chuck with automatic spindle lock for quick and easy bit change
Ergonomic handle and rubber over mould to provide ultimate end user comfort

Standard Equipment: Battery and charger sold separately

Chuck Capacity	1.0-10 mm
Power Output	360 Watt
No Load Speed	0-650/2000 rpm
Max Torque	33 Nm
Max. Drilling Capacity (Wood)	28 mm
Max. Drilling Capacity (Metal)	10 mm
Weight	1.3 kg
Length x Height	325 x 102 mm

XR

18V

10mm


2 SPEED

LED

18V XR Li-Ion Brushless 3 Speed Impact Driver

NEW

DCF895M2-XE/DCF895N-XE*



Brushless Motor Technology for excellent efficiency and Extreme Runtime
3 Speeds for Maximum Control in all applications
Embedded Hex Design enables operation in confined spaces
Ultra compact, lightweight design allows use in confined spaces

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kit box

Battery Capacity	4.0 Ah
Max Torque	170 Nm
Power Output	290 Watt
No Load Speed	0-950/0-1900/0-2850 rpm
Impacts per Minute	0-1300/0-2400/0-3300 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.7 kg
Length x Height	132 x 240 mm

XR

18V

BRUSHLESS

4.0Ah

3 SPEED


LED

*Available as bare unit, without batteries, kit box and charger as N version.

18V XR Li-Ion Brushless Impact Driver

NEW

DCF886M2-XE*/DCF886N-XE



Brushless Motor Technology for excellent efficiency and Extreme Runtime
3 LED 'Halo' ring provides maximum illumination of work piece
Ultra compact, lightweight design allows use in confined spaces

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Magnetic bit holder, Heavy duty kit box

Battery Capacity	4.0 Ah
Max Torque	165 Nm
Power Output	280 Watt
No Load Speed	0 - 2800 rpm
Impacts per Minute	0 - 3200 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.57 kg
Length x Height	140 x 245 mm

XR

18V

BRUSHLESS

4.0Ah


LED

*Available as bare unit, without batteries, kit box and charger as N version

18V XR Li-Ion Impact Driver

NEW

DCF885M2-XE/DCF885C2-XE/DCF885N-XE*



Ultra compact, light weight design allows for use in confined spaces
Bright white LED ring with delay feature for improved visibility and flashlight functionality
Intelligent trigger allowing total control over all applications

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	155 Nm
Power Output	250 Watt
No Load Speed	0-2800 rpm
Impacts per Minute	0-3200 ipm
Max. Bolt Diameter	M12
Bit Holder	1/4" (6.35mm)
Weight	1.62 kg
Length x Height	141 x 236 mm

XR

18V

4.0Ah


LED

*Table reflects M2 version, C2 version shipped with 1.5Ah battery packs. Available as bare unit, without batteries, kit box and charger as N version

18V XR Li-Ion High Torque Impact Wrench

NEW

DCF889M2-XE/DCF889N-XE*



Powerful fan cooled motor delivers up to 540 Nm of torque and up to 2300 impacts per minute for heavy duty fastening applications
Bright white LED ring with delay feature for improved visibility and flashlight functionality
User preferred rubber XR grip and switch for greater application comfort and maximum control

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	540 Nm
Power Output	449 Watt
No Load Speed	0 - 1500 rpm
Impacts per Minute	0 - 2300 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2" (12.7mm)
Weight	3.4 kg
Length x Height	264 x 260 mm

XR

18V

4.0Ah


LED

*Available as bare unit, without batteries, kit box and charger as N version

18V XR Li-Ion Impact Wrench

NEW

DCF880M2-XE/DCF880N-XE*



Ultra compact, light weight design allows for use in confined spaces
Bright white LED ring with delay feature for improved visibility and flashlight functionality
Intelligent trigger allowing total control over all applications

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-voltage XR charger, Belt hook, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	203 Nm
Power Output	250 Watt
No Load Speed	0 - 2300 rpm
Impacts per Minute	0 - 2700 ipm
Max. Bolt Diameter	M16
Bit Holder	1/2" (12.7mm)
Weight	1.62 kg
Length x Height	147 x 240 mm

XR

18V

4.0Ah


LED

*Available as bare unit, without batteries, kit box and charger as N version

18V XR Li-Ion Brushless Oscillating Multi-Tool

NEW

DCS355M2-XE/DCS355D2-XE/DCS355N-XE*



Brushless Motor Technology for excellent efficiency and Extreme Runtime
QUICK-CHANGE Accessory System allows blades and attachments to be changed quickly without the use of tools
Bright LED light illuminates dark work surfaces for accurate cutting

Standard Equipment: 2 x 4.0Ah XR Li-Ion battery packs with state of charge indicator, Multi-Voltage XR Charger, 1 x 31 x 43mm Fast Cut Wood Blade, 1 x 31 x 43mm Wood with Nails Blade, 1 x Rigid Scraper Blade, 1 x Semi Circle Blade, 1 x Carbide Grout Removal Blade, 1 x Wood Detail Blade, 1 x Sanding Pad, 25 Sheets Assorted Sanding Paper, 1 x Dust Extraction Adaptor, 1 x Depth Control Straight Cutting Guide, 1 x Universal Blade Adaptor, Heavy duty TSTAK kit box

Battery Capacity	4.0Ah
Power Output	300 Watt
Speed	0-20,000 min/-1
Switch type	Variable Dual Grip
Tool Free Accessory Fitment	Yes
Length	310 mm
Weight	1.68 kg

XR

18V

BRUSHLESS


4.0Ah

LED

*Table reflects M2 version, D2 version shipped with 2.0Ah battery packs. Available as bare unit, without batteries, kit box and charger as N version. N version accessory kit differs from list shown

18V XR Li-ion Brushless 2 Speed Framing Nailer

NEWDCN629P2-XE



BRUSHLESS motor technology offers the power to fire a 90mm Ring Shank nail in Soft Wood and 63mm into Hard Woods
The sequential operating mode allows for precision placement and the bump operating mode provides the user with production speed
2 Speed selector, maximizing runtime for shorter nails
Gas Free Operation

Standard Equipment: 2 x 5.0Ah XR Li-ion battery packs with state of charge indicator, Multi-voltage XR charger, Reversible belt hook, Non-mar tip, Heavy duty kit box

Nailer Service Spring Kit Available: DCN6901-XJ

XR


18V

BRUSHLESS

2 SPEED

18V XR Li-ion Brushless Framing Nailer

NEWDCN690M2-XE/DCN690N-XE*



BRUSHLESS motor technology offers the power to fire a 90mm Ring Shank nail in Soft Wood and 63mm into Hard Woods
The sequential operating mode allows for precision placement and the bump operating mode provides the user with production speed
Gas Free Operation

Standard Equipment: 2 x 4.0Ah XR Li-ion battery packs with state of charge indicator, Multi-voltage XR charger, Reversible belt hook, Non-mar tip, Heavy duty kit box

Nailer Service Spring Kit Available: DCN6901-XJ

XR


18V

BRUSHLESS

2 SPEED

18V XR Li-ion 125mm Grinder

DCG412M2-XE/DCG412N-XE*



Powerful & highly efficient PMS8 DeWALT fan cooled motor with replaceable brushes, delivers up to 7000 rotations per minute for fast cutting and grinding applications
Steel cut spiral bevel gears provide highest level of durability and low vibration, increasing user productivity
Low profile jam pot gear case improves gear durability and ergonomics
Intelligent trigger & lock-off switch for enhanced work safety & control


Standard Equipment: 2 position side handle, Keyless protective guard, Blade Wrench, Multi-voltage charger, 2 x 4.0Ah XR Li-ion battery packs with state of charge indicator, Heavy duty kit box

XR

18V

18V XR Li-ion Reciprocating Saw

DCS380N-XE



Powerful & highly efficient PMS8 DeWALT fan cooled motor with replaceable brushes, delivers fast cutting action up to 2,950 strokes per minute and 28.6 mm stroke length maximising user productivity
Intelligent variable speed trigger, lock-off switch and electronic motor brake for quick controlled cuts and enhanced work safety
Lever-action keyless blade clamp for quick and easy blade changes
Pivoting adjustable shoe with open top for high stability and blade visibility during a cut


Standard Equipment: Battery and charger sold separately

XR

18V

18V XR Li-ion Jigsaw

DCS331N-XE



Powerful & highly efficient DeWALT PMS8 fan-cooled motor with replaceable brushes. Delivers fast cutting action up to 3000 strokes per minute maximising user productivity
Intelligent variable speed trigger & lock-off switch for quick controlled cuts and enhanced work safety
Tool-free adjustable shoe with anti-scratch cover bevels 45 degrees in both directions
Quick and easy patented keyless blade change system, accepts T-shank blades


Standard Equipment: Anti-scratch shoe cover, Dust port. Battery and charger sold separately

XR

18V

18V XR Li-ion Circular Saw

DCS391N-XE



Powerful & highly efficient PMS8 DeWALT fan cooled motor with replaceable brushes delivers up to 3700 rotations per minute for fast cutting action
Ergonomic handle set with rubber overmould to optimise comfort
Extremely durable tool design, including a cast magnesium base for repetitive, accurate cuts
Intelligent variable speed trigger


Standard Equipment: 165 mm carbide blade, Hex Key, Dust Port, Rip fence. Battery and charger sold separately

XR

18V

18V XR Li-ion Metal Cutting Circular Saw

DCS373N-XE



Powerful & highly efficient PMS8 DeWALT fan-cooled motor with replaceable brushes delivers up to 3700 rotation per minute for fast cutting action
Ergonomic handle set with rubber overmould to optimise end user comfort
Extremely durable tool design with steel shoe to withstand rough job site conditions
Intelligent variable speed trigger


Standard Equipment: 140 mm tungsten carbide blade, Hex key. Battery and charger sold separately

XR

18V

18V XR Li-ion LED Pivot Light

NEWDCL050-XE



Compact, lightweight design with impact resistant housing
LED Bulb producing 250-500 (2 Mode) Lumen Output with broad and even light pattern
9 position articulating head for directional control and light output
Flashlight includes an integrated hook for hanging & can be used free standing


Standard Equipment: Battery and charger sold separately

XR

18V

18V XR Li-ion LED Pivot Light

DCL040-XE




Compact, lightweight design with impact resistant housing
LED Bulb producing 110 Lumen output (10,000Hr Life) with a 2 Zone light pattern
Flashlight head pivots more than 90 degrees vertically with ratchet lock
Flashlight includes an integrated hook for hanging & can be used free standing

Standard Equipment: Battery and charger sold separately

XR

18V

JIGSAW BLADES



XR

18V

XPC -The ultimate DeWALT jigsaw blade solution for control and accuracy of cut

- Premium steel for maximum durability & thicker body for easy control and ultimate accuracy
- Optimised tooth geometry for longer life and reduced breakout
- Increased speed - large deep gullets for easy chip removal
- Plunge point tip design for easy plunge cut

XR COMBO KITS

DeWALT Combo kits are available in a variety of modular storage systems, that provide ultimate convenience and flexibility.

The wide range of Combo kits available allows DeWALT users to design a perfect solution for their trade & applications.



10.8V XR Li-Ion 2 Piece Kit **DCK211D2T-XE**



DCD710 2 Speed Drill Driver
DCF815 Impact Driver
2 x 2.0Ah Slide Pack Batteries
Multi-voltage charger
TSTAK Kit Box



18V XR Li-Ion 2 Piece Kit **DCK280C2-XE**



DCD780 2 Speed Drill Driver
DCF885 Impact Driver
2 x 1.5Ah Slide Pack Batteries
Multi-voltage charger
Heavy Duty Kit Box



DCD785 2 Speed Hammer Drill
DCF885 Impact Driver
2 x 1.5Ah Slide Pack Batteries
Multi-voltage charger
Heavy Duty Kit Box



18V XR Li-Ion 2 Piece Kit **DCK285M2-XE**



DCD785 2 Speed Hammer Drill
DCF885 Impact Driver
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box



18V XR Li-Ion 2 Piece Kit **DCK290M2-XE**



DCD985 XRP 3 Speed Hammer Drill
DCF885 Impact Driver
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box



DCD985 XRP 3 Speed Hammer Drill
DCF880 Impact Wrench
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box



18V XR Li-Ion 4 Piece Kit **DCK490M2-XE**



DCD785 2 Speed Hammer Drill
DCF885 Impact Driver
DCS391 Circular Saw
DCS380 Reciprocating Saw
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box
DS400 Tough System Kit Box



18V XR Li-Ion 6 Piece Kit **DCK693M3-XE**



DCD985 XRP 3 Speed Hammer Drill
DCF885 Impact Driver
DCS391 Circular Saw
DCS380 Reciprocating Saw
DCG412 125mm Grinder
DCL040 LED Pivot Light
3 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS300 Tough System Kit Box
DS400 Tough System Kit Box



18V XR Li-Ion Brushless 2 Piece Kit

DCK263M2-XE



DCD790 Brushless 2 Speed Drill Driver
DCN690 Brushless Framing Nailer
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS400 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **4.0 AH** **18V**

18V XR Li-Ion Brushless 2 Piece Kit

DCK250D2-XE



DCD795 Brushless 2 Speed Hammer Drill
DCF886 Brushless Impact Driver
2 x 2.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **2.0 AH** **18V**

18V XR Li-Ion Brushless 2 Piece Kit

DCK250M2-XE



DCD795 Brushless 2 Speed Hammer Drill
DCF886 Brushless Impact Driver
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **4.0 AH** **18V**

18V XR Li-Ion Brushless 2 Piece Kit

DCK250P2-XE



DCD795 Brushless 2 Speed Hammer Drill
DCF886 Brushless Impact Driver
2 x 5.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **5.0 AH** **18V**

18V XR Li-Ion Brushless 2 Piece Kit

DCK255M2-XE



DCD995 Brushless XRP 3 Speed Hammer Drill
DCF886 Brushless Impact Driver
2 x 4.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **4.0 AH** **18V**

18V XR Li-Ion Brushless 2 Piece Kit

DCK255P2-XE



DCD995 Brushless XRP 3 Speed Hammer Drill
DCF886 Brushless Impact Driver
2 x 5.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box

BRUSHLESS TOUGHSYSTEM™ **5.0 AH** **18V**

18V XR Li-Ion Brushless 4 Piece Kit

DCK450P2-XE



DCD795 Brushless 2 Speed Hammer Drill
DCF886 Brushless Impact Driver
DCS391 Circular Saw
DCS380 Reciprocating Saw
2 x 5.0Ah Slide Pack Batteries
Multi-voltage charger
DS150 Tough System Kit Box
DS400 Tough System Kit Box

INCLUDES **BRUSHLESS TOUGHSYSTEM™** **5.0 AH** **18V**

18V XR Li-Ion Brushless 6 Piece Kit

DCK653P3-XE



DCD995 Brushless XRP 3 Speed Hammer Drill
DCF895 Brushless 3 Speed Impact Driver
DCS391 Circular Saw
DCS380 Reciprocating Saw
DCG412 125mm Grinder
DCL040 LED Pivot Light
3 x 5.0Ah Slide Pack Batteries
Multi-voltage charger
DS300 Tough System Kit Box
DS400 Tough System Kit Box

INCLUDES **BRUSHLESS TOUGHSYSTEM™** **5.0 AH** **18V**

XR LI-ION

		DCB100-XE	DCB105-XE	DCB119-XE	DCB102-XE	DCR017-XE
						
	DCB123-XE 10.8V 1.5Ah Li-Ion	✓	✓	✓	✓	✓
	DCB183-XE 18V 2.0Ah Li-Ion		✓	✓	✓	✓
	DCB182-XE 18V 4.0Ah Li-Ion		✓	✓	✓	✓
	DCB184-XE 18V 5.0Ah Li-Ion		✓	✓	✓	✓

TOWER PACKS

	
	DC9310-XE
	DC9071-XE 12V 2.4Ah NiCd ✓
	DC9091-XE 14.4V 2.4Ah NiCd ✓
	DC9096-XE 18V 2.4Ah NiCd ✓
	DC9180-XE 18V 2.0Ah Li-Ion ✓

36V LI-ION

		
	DC9000-XE	
	DCB361-XE 36V 2.0Ah Li-Ion	✓
	DCB360-XE 36V 4.0Ah Li-Ion	✓

36V Li-Ion Heavy Duty SDS Plus 3 Mode Dedicated Hammer with Quick Change Chuck

DCH364M2-XE



Ideal for drilling anchors and fixing holes into concrete, brick and masonry from 4mm to 26mm
Rotation stop mode for light chiselling in plaster, tiles and render and impact stop mode for rotary only drilling in wood and metal
Best in class vibration, 7.1m/s² reduces user fatigue and maximises operating periods
Quick release SDS-Plus toolholder and keyless chuck supplied for easy switching between hammer / rotary hammer and rotary only applications
Standard Equipment: 2 x 4.0Ah Li-Ion battery packs, 36V Charger, Multi-position side handle, Quick release SDS plus toolholder, Quick release 13mm 3 jaw chuck, Heavy duty kit box

Battery Capacity	4.0 Ah
Power Output	600 Watt
No Load Speed	0-1100 rpm
Impact energy (EPTA 05/2009)	2.3 J
Blows per Minute	0-4500 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity (Wood)	30 mm
Max. Drilling Capacity (Metal)	16 mm
Max. Drilling Capacity (Concrete)	26 mm
Weight	4.1 kg
Length x Height	340 x 223 mm
Hand/Arm Vibration - Drilling	7.1 m/s ²

36V Cordless Dust Extraction System

D25302DH-XJ



Ideal for dust free drilling up to 16 mm in diameter with any DeWALT 36V SDS-Plus hammer
Powered by an independent motor maintaining maximum hammer performance with no decrease in durability
High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns
Quick release for easy tool free assembly
Standard Equipment: Cordless dust extraction system, Side handle with dust extraction adaptation, Telescope, extraction head and depth rod, Connector pipe, Large kit box

Fits	Any DeWALT 36V SDS-Plus Hammer
Collar Diameter	54 mm
Max. Drill Bit Diameter	16 mm
Max. Drill Bit Length	210 mm
Max. Drilling Depth	150 mm
Hose Length	215 mm
Hose Diameter	32 mm
Weight	1.8 kg
Length x Height	502 x 360 mm

36V Li-Ion Heavy Duty High Torque Impact Wrench

DC800M2-XE



Powerful fan cooled motor delivers up to 440 Nm of max torque and up to 2500 impacts per minute for heavy duty fastening applications
All metal gearing for efficient power transmission and long tool life
Aluminium front housing for better weight and balance
Modular component design for easy access and fast service
Standard Equipment: 2 x 4.0Ah Li-Ion battery packs, 36V charger, Heavy duty kit box

Battery Capacity	4.0 Ah
Max. Torque	440 Nm
Power Output	800 Watt
No Load Speed	1400 rpm
Impacts per Minute	2500 ipm
Max. Bolt Diameter	M20
Bit Holder	1/2" (12.7mm)
Weight	3.4 kg
Length x Height	273 x 275 mm

36V Heavy Duty 125mm Grinder

DC415P-XE



Powerful DeWALT fan cooled motor delivers maximum power and durability
Keyless guard for enhanced application versatility
2 position anti vibration side handle offers comfort and control
Battery pack produces 36 Volt Li-Ion power at equivalent weight to 18 Volt NiCd/NiMH pack weight
Standard Equipment: Keyless protective guard, 2 position anti vibration side handle, Wrench

Max. Disc Diameter	125 mm
Power Output	815 Watt
No Load Speed	6500 rpm
Spindle Thread	M14
Weight	2.4 kg
Length x Height	340 x 150 mm

GRINDER ACCESSORIES



DeWALT Extreme cutting and grinding discs provide the best overall project cost per cut or grind*. Increased productivity is achieved through:

- Higher grain content so that there is more grain contained in the disc to perform the desired task.
- Premium grain content so that the grain cut or grind longer.
- Superior resin compound so that the grains are refreshed when their cutting / grinding ability wears out. Not too soon but not too late so as to compromise performance.

DeWALT Extreme cutting and grinding discs lead to reduced down time, less disc changes, and greater application performance resulting in increased productivity.

***When compared to DeWALT standard bonded abrasive discs.**

CONSTRUCTION INSTRUMENTS

LEVELLING – MEASURING – DETECTING

GUARANTEED TOUGH.

2 Way Self-levelling Line Laser (Horizontal and Vertical)

DW088K-XE



Self-levelling cross line laser is accurate to ± 0.3 mm/m in levelling applications
Self-levelling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds
2 button operation and low battery indication for ease of use
Built in magnetic pivot bracket mounts easily on metal surfaces

Standard Equipment: 3 x AA size alkaline batteries, Wall mount bracket, Heavy duty kit box

Laser class	2, <1mW
Paesnost	± 0.3 mm/m
Number of beams	2
Direction of beams	vertical/level
Indoor Visibility Range	10 m
Self-levelling Range	$\pm 4^\circ$
Power Supply	4.5V - 3x AA
Tripod connection	1/4"
Weight (incl. battery)	0.46 kg
Length x Height	112 x 113 mm



3 Way Self-levelling Multi Line Laser (Horizontal, Vertical and Side Lines)

DW089K-XE



Self-levelling multi line laser is accurate to ± 0.3 mm/m in levelling applications
Self-levelling up to 4 degrees surface angle with automatic out of level indication, marks a levelled line in seconds
3 button operation and low battery indication for ease of use
An adjustment dial for fine line movement (vertical & side)

Standard Equipment: 4 x AA size alkaline batteries, Wall mount bracket, Heavy duty kit box

Laser class	2, <1mW
Paesnost	± 0.3 mm/m
Number of beams	3
Direction of beams	vertical/horizontal/side
Indoor Visibility Range	15 m
Self-levelling Range	$\pm 4^\circ$
Power Supply	6.0V - 4 x AA
Tripod connection	1/4"
Weight (incl. battery)	0.8 kg
Length x Height	135 x 145 mm



LASER DISTANCE MEASURER - 50M

DW03050-XJ



Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site
It has a range of up to 50m and an accuracy of ± 1.5 mm
Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.
The user can select the unit to continually measure which allows layout applications.

Standard Equipment: 2 x 1.5v dc LR03 (AAA-size) batteries

Laser class	Class 2
Levelling Accuracy	± 1.5 mm/m
Number of beams	1
Indoor Visibility Range	50m
Power Source	2 x 1.5v dc LR03 (AAA-size) batteries
Weight (incl. battery)	0.15 kg

LASER DISTANCE MEASURER - 100M

DW03101-XJ



Laser distance measurer (LDM) manufactured to withstand the inevitable drops and falls on the Job site
It has a range of up to 100m and an accuracy of ± 1 mm
Common end-user functions : linear meter readings, surface and volume calculations. It will add or subtract readings and calculate distance in Metric and Imperial.
The user can select the unit to continually measure which allows layout applications.

Standard Equipment: 2 x 1.5v dc LR03 (AAA-size) batteries

Laser class	Class 2
Levelling Accuracy	± 1 mm/m
Number of beams	1
Indoor Visibility Range	100m
Power Source	2 x 1.5v dc LR03 (AAA-size) batteries
Tripod connection	yes
Weight (incl. battery)	0.13 kg

Laser Level Attachments

DE0892-XE














































DE0881-XE



Cat. No.	Description
DE0892-XE	Line Laser Detector
DE0881-XE	Lightweight 1/4" (6.354mm) Thread Mini Tripod


To help you choose the right laser, please consider the following:

• Laser functions • Working inside or outside • Working range/distance


		 DW088K	 DW089K	 DW03050	 DW03101
	Interior				
	Exterior				
	Interior				
	Exterior				
	Face Square				
	Level & Square				
	Level & Square Exterior				
	90° Square				
	Vertical & Square				
	Vertical Transfer				
	Angle Transfer/ Setting				
	Distance Estimation				
	Optimum Working Range	10	15	50	100
		50	50		

 Gold Choice

 Silver Choice

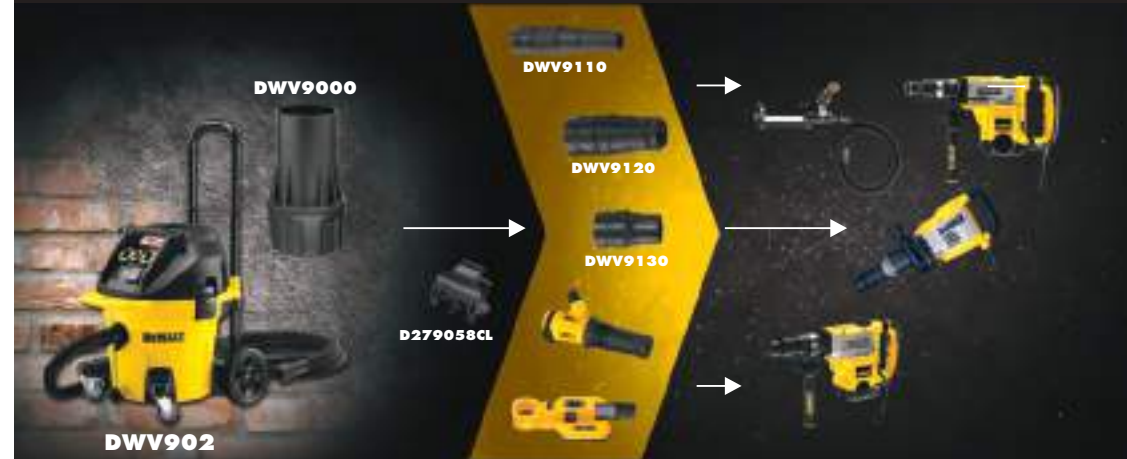DEWALT
**AIR
LOCK**
MASONRY

DUST EXTRACTION TO POWER TOOL CONNECTION SYSTEM

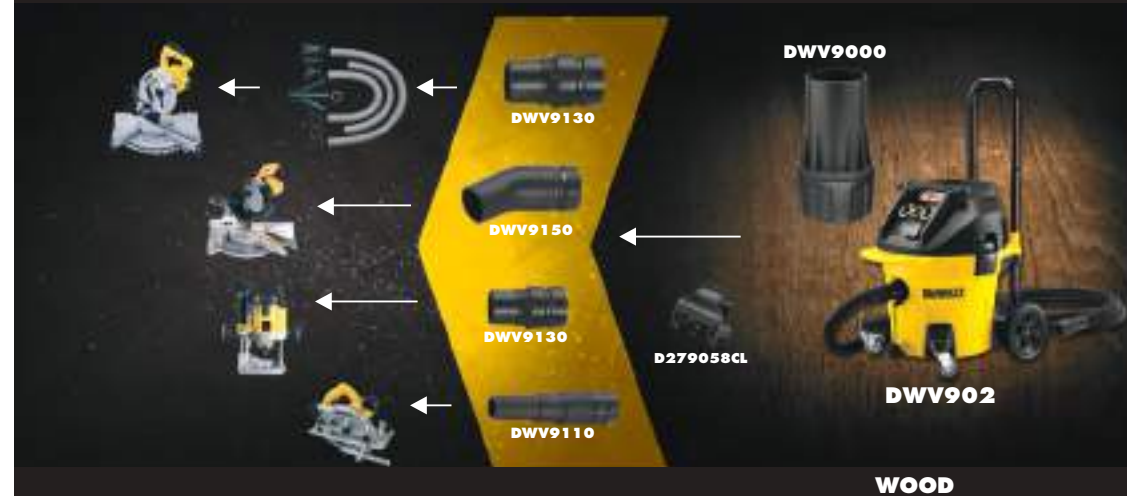EASY TO USE - FAST CLICK CONNECTION TO ANY POWER TOOL WITH A DUST PORT.


WOOD

LONG LASTING, JOBSITE TOUGH
Visit www.DEWALT.com for more details

DRILLING & SCREWDRIVING

Depth Sensitive VSR Screwdriver

DW266-XE


Ideal for use with TEK screws
Depth sensitive 'set and forget' nosepiece for consistent fastener depth
Helical cut, heat treated steel gears for long life & durability

Max Torque	14.8 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2500 rpm
Max. Screw Diameter	4.8 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	306 x 186 mm



Versaclutch Screwdriver

DW268-XE


Ideal for screwdriving applications in wood, plastic and metal
Versatile tool with torque control up to 26 Nm
Unique Versa Clutch Torque Control System allows a torque level to be set whilst maintaining an override capability for driving screws into material of inconsistent density such as wood
Lightweight and compact design to reduce user fatigue and increase productivity

Max Torque	4.26 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-2500 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 187 mm



High Torque Versaclutch Screwdriver

DW269-XE


Ideal for screwdriving applications in wood, plastic and metal
Versatile tool with torque control up to 42 Nm
Unique Versa Clutch Torque Control System allows a torque level to be set whilst maintaining an override capability for driving screws into material of inconsistent density such as wood
Lightweight and compact design to reduce user fatigue and increase productivity

Max Torque	4.42 Nm
Power Input	540 Watts
Power Output	295 Watt
No Load Speed	0-1000 rpm
Max. Screw Diameter	6.3 mm
Tool Holder	(Hex) 6.35 mm
Weight	1.3 kg
Length x Height	301 x 187 mm



10mm Rotary Drill

DWD014S-XE


Keyless ratcheting chuck for quick and easy bit change
Compact design enables comfortable one handed use and allows access to tight spaces
Low weight ensures the drill is easy to use and it reduces user fatigue
Speed dial switch ensures constant speed control to suit different hole sizes in different materials

Chuck Capacity	1.0-10 mm
Power Input	550 Watts
Power Output	269 Watt
Max Torque	7.9 Nm
No Load Speed	0-2800 rpm
Max. Drilling Capacity [Wood]	25 mm
Max. Drilling Capacity [Steel]	10 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	1.34 kg
Length x Height	225 x 170 mm



13mm Rotary Drill

DW236-XE


13 mm keyless chuck with innovative spindle lock system for quick and easy bit change with one hand to aid productivity
High overload capacity motor prevents failure in heavy duty applications
Heavy duty metal gear box for added durability

Chuck Capacity	1.5-13 mm
Power Input	701 Watts
Power Output	385 Watt
Max Torque	35.8 Nm
No Load Speed	0-850 rpm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Steel]	13 mm
Spindle Thread	1/2" X 20 U.N.F.
Weight	1.6 kg
Length x Height	295 x 198 mm



13 mm Mixer and Rotary Drill

D21520-XE



Variable speed reversing switch offers greater control for a wider range of applications
550 RPM provides increased torque for heavy duty drilling and mixing
Robust design and metal gear case for greater durability
2-position rear spade handle and 3-position side handle gives greater control

Standard Equipment: 3-position side handle, 2-position rear handle, Chuck key with holder

Chuck Capacity	2.0-13 mm
Spindle Thread	5/8" x 16 U.N.F
Tool Holder	Keyed Chuck
Power Input	710 Watts
Power Output	560 Watt
Max Torque	50 Nm
No Load Speed	0-550 rpm
Max. Capacity	160 mm
Weight	3.4 kg
Length x Height	400 x 215 mm



13mm 2 Speed Percussion Drill 770W

D21810KS-XE



Two speed gearbox for increased torque
Improved drilling performance due to NEW motor
Improved ergonomics with NEW polymer gear case
NEW gear design to give improved life

Standard Equipment: Multi position side-handle, depth stop, Heavy Duty kit box

Chuck Capacity	1.5-13 mm
Power Input	770 Watts
Power Output	425 Watt
Max Torque	40/20 Nm
No Load Speed	0-1100 / 0-2700 rpm
Blows per Minute	0-18700 / 0-45900 bpm
Max. Drilling Capacity (Wood)	35 mm
Max. Drilling Capacity (Steel)	13 mm
Max. Drilling Capacity (Concrete)	20 mm
Spindle Thread	1/2" X 20 U.N.F
Weight	2.3 kg
Length x Height	352 x 199 mm



13mm 2 Speed Percussion Drill 850W

D21815KS-XE



Two speed gearbox for increased torque
Improved drilling performance due to NEW motor
Improved ergonomics with NEW polymer gear case
NEW gear design to give improved life

Standard Equipment: Multi position side-handle, depth stop, Heavy Duty kit box

Chuck Capacity	1.5-13 mm
Power Input	850 Watts
Power Output	465 Watt
Max Torque	40/20 Nm
No Load Speed	0-1100 / 0-2700 rpm
Blows per Minute	0-18700 / 0-45900 bpm
Max. Drilling Capacity (Wood)	40 mm
Max. Drilling Capacity (Steel)	13 mm
Max. Drilling Capacity (Concrete)	20 mm
Spindle Thread	1/2" X 20 U.N.F
Weight	2.4 kg
Length x Height	352 x 199 mm



EXTREME METAL DRILL BITS



▼ APPLICATIONS

Suitable for portable drilling of steel, alloyed and non-alloyed
For drilling sheet or thin materials (Also suitable for use in wood and plastics)

▼ FEATURES

EXTREME 2™ Metal Bullet tip starts drilling on contact eliminating walking
Cleaner, more accurate, burr-free holes due to recessed cutting wings
Faster drilling - up to 4X faster than standard HSS-R drill bits
Increased durability - up to 50% stronger than standard HSS-R drill bits
Tapered web greatly reduces breakage, increases durability and life
Gold Ferrous Oxide coating prevents overheating for longer bit life





HAMMERS

2kg 22mm SDS-Plus 3 Mode Combination Hammer

D25013K-XE



Drilling 4-22mm diameter anchor holes into concrete and masonry
Impact stop for drilling in wood, steel, plastic and screwdriving applications
Rotation stop for light chiselling in concrete and masonry
Variable speed switch and full power in forward and reverse for total control

Standard Equipment: Multi-position side handle, Depth stop, Heavy duty kit box



LED Side Handle Available: D250521-JJ



Power Input	650 Watts
Power Output	300 Watt
No Load Speed	0-1550 rpm
Blows per Minute	0-4550 bpm
Impact energy (EPTA 05/2009)	1.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity (Wood)	30 mm
Max. Drilling Capacity (Metal)	13 mm
Max. Drilling Capacity (Concrete)	22 mm
Max. Drilling Capacity (Core bit)	50 mm
Weight	2.5 kg
Length x Height	325 x 210 mm
Hand/Arm Vibration - Drilling	11 m/s ²

2kg 26mm Heavy Duty SDS-Plus 3 Mode Combination Hammer with Quick Change Chuck

D25124K-XE



Ideal for drilling anchor and fixing holes into concrete and masonry from 4 to 26 mm in diameter
Rotation-stop for light chiselling applications in brick, soft masonry and occasionally concrete
Impact-stop and Quick Change Removable Chuck for drilling in wood, steel, ceramic and screwdriving applications

Standard Equipment: "Quick Change" 13 mm 3-jaw keyless chuck, Multi-Position side handle, Depth stop, Heavy duty kit box



LED Side Handle Available: D253241-JJ



Power Input	800 Watts
Power Output	395 Watt
No Load Speed	0-1150 rpm
Blows per Minute	0-4300 bpm
Impact energy (EPTA 05/2009)	2.8 J
Tool Holder	SDS-Plus
Max. Drilling Capacity (Wood)	30 mm
Max. Drilling Capacity (Metal)	13 mm
Max. Drilling Capacity (Concrete)	26 mm
Max. Drilling Capacity (Core bit)	65 mm
Weight	2.9 kg
Length x Height	352 x 200 mm
Hand/Arm Vibration - Drilling	17.8 m/s ²

4kg 32mm Heavy Duty SDS-Plus 3 Mode Combination Hammer

NEW D25141K-XE



Active vibration control with floating back handle delivers extremely low vibration and more comfort
Quick change 3 jawed chuck provides speed, precision and flexibility when drilling in wood, ceramic and steel
Optimised power to weight ratio good power in light weight package
Rotation-stop for light chiselling applications, render and tile removal

Standard Equipment: Quick release SDS+ removable tool holder, Quick release 3 jaw removable chuck, Multi-position side handle, Quick release 3 jaw removable chuck, SDS+ Chisel, 2 x SDS+ drill bits, 4 x HSS drill bits, 4 x brad point wood drill bits, 2 x flatwood drill bits, Safety glasses, Gloves, Heavy duty TStok kit box



Power Input	1000 Watts
Power Output	650 Watt
No Load Speed	0-820 rpm
Blows per Minute	0-4700 bpm
Impact energy (EPTA 05/2009)	4.2 J
Tool Holder	SDS-Plus
Max. Drilling Capacity (Wood)	40 mm
Max. Drilling Capacity (Metal)	16 mm
Max. Drilling Capacity (Concrete)	6-32 mm
Max. Drilling Capacity (Core bit)	90 mm
Weight	4.3 kg
Length x Height	370 x 250 mm
Hand/Arm Vibration - Drilling	8.2 m/s ²

6kg 45mm SDS-Max Combination Hammer

D25601K-XE



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 45 mm in diameter. Core drilling up to 100 mm
Chain drive improves durability and increases efficiency together with an oil filled gearbox to ensure total component lubrication and superior heat dissipation
Active Vibration Control system incorporating a floating rear handle and damped side handle to reduce vibration

Standard Equipment: Multi-position anti-vibration side handle, Accessory kit, Heavy duty kit box



Power Input	1250 Watts
Power Output	615 Watt
Load Speed	210-415 rpm
Blows per Minute	1260-2520 bpm
Impact energy (EPTA 05/2009)	8 J
Tool Holder	SDS-Max
Max. Drilling Capacity (Concrete)	45 mm
Max. Drilling Capacity (Breakthrough bit)	65 mm
Max. Drilling Capacity (Core bit)	100 mm
Weight	6.8 kg
Length x Height	477 x 245 mm
Hand/Arm Vibration - Drilling	8.8 m/s ²

7kg 48mm SDS-Max Combination Hammer

NEW D25722K-XE



Ideal for drilling anchor fixing and through holes in concrete and masonry from 12 to 48 mm in diameter. Core drilling up to 125 mm
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
Complete Torque Control. A patented 2 step clutch allows the user to select one of two settings for different diameter drill and core bits providing the maximum level of protection in all drilling applications
Electronic variable speed and impact energy control

Standard Equipment: Multi-position side handle, Heavy duty kit box



Power Input	1400 Watts
Power Output	840 Watt
Load Speed	137-275 rpm
Blows per Minute	1260-2520 bpm
Impact energy (EPTA 05/2009)	11 J
Tool Holder	SDS-Max
Max. Drilling Capacity (Concrete)	48 mm
Max. Drilling Capacity (Breakthrough bit)	80 mm
Max. Drilling Capacity (Core bit)	125 mm
Weight	9.1 kg
Length x Height	528 x 268 mm
Hand/Arm Vibration - Drilling	7.5 m/s ²

10kg SDS-Max Demolition Hammer

NEW D25902K-XE



Powerful and durable 1500 Watt motor delivers outstanding concrete breaking performance
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions
Magnesium housings ensure maximum durability and minimum weight

Standard Equipment: Multi position side handle, Chisel, Heavy duty carrying case

Power Input	1550 Watts
Power Output	750 Watt
Blows per Minute	1020-2040 bpm
Impact energy (EPTA 05/2009)	19 J
Tool Holder	SDS-Max
Weight	10.9 kg
Length x Height	690 x 250 mm
Hand/Arm Vibration	7.5 m/s ²



12kg 19mm HEX Demolition Hammer

D25941K-XE



Powerful and durable 1600 Watt motor delivers outstanding concrete breaking performance
Active Vibration Control system incorporating a counterbalance mass and floating handle delivers extremely low vibration
In line design for better handling and quick change chisel adjustment allows fast orientation of the chisel through 12 preset positions
Magnesium housings ensure maximum durability and minimum weight

Standard Equipment: Multi position side handle, Pointed chisel, Heavy duty kit box

Power Input	1600 Watts
Power Output	790 Watt
Blows per Minute	1620 bpm
Impact energy (EPTA 05/2009)	22.5 J
Tool Holder	19mm Hex
Weight	13.8 kg
Length x Height	750 x 250 mm
Hand/Arm Vibration	8.8 m/s ²



16kg 30mm HEX Demolition Hammer

D25961K-XE



Highest productivity due to an optimum balance of power, impact energy and vibration
Lowest vibration in the 16kg class ensures the highest trigger time
50% longer service intervals than the nearest competitor for lower running costs and less down time
Robust and proven design provides the longest lasting 16kg breaker

Standard Equipment: Pointed chisel, Multi position side handle, Heavy duty kit box

Power Input	1600 Watts
Power Output	1000 Watt
Blows per Minute	1450 bpm
Impact energy (EPTA 05/2009)	35 J
Tool Holder	30mm HEX
Weight	16.9 kg
Length x Height	760 x 260 mm
Hand/Arm Vibration	6.8 m/s ²



30kg 28mm HEX Pavement Hammer

D25980-XE



Large oversize mechanism delivers extreme durability and excellent breaking performance
2100 Watt motor delivers outstanding efficiency and durability
Active Vibration Control offers safer, more comfortable use and more productivity
Suspended Handle System absorbs the rebound and, working with the AVC, delivers the lowest vibration on the market
Optimised motor and hammer mechanism deliver best performance on the market
Heavy duty electronic module for constant power under load

Power Input	2100 Watts
Power Output	1200 Watt
Blows per Minute	900 bpm
Impact energy (EPTA 05/2009)	52 J
Tool Holder	28 mm Hex
Weight	31 kg
Length x Height	780 x 620 mm
Hand/Arm Vibration	4.8 m/s ²



Trolley Available: D259801-XJ



PRODUCT DEVELOPMENT

Through extensive field research, DEWALT has gained a comprehensive knowledge of user needs and applications. Its world-class development facility utilises the latest Catia CAD system and automated test equipment to develop and test all drill bits prior to and during manufacture.



QUALITY CONTROL

DEWALT is a long-standing member of PRUF GEMEINSCHAFT MAUERBOHRER (PGM), an internationally recognised organisation that verifies the suitability of drill bits for use in anchor fixing. To test drill bit life and durability 1 million holes are drilled into 350 tons of concrete each year, this will ensure that if there is any variability in quality it is detected before the products are delivered to the end user. All drill bits are certified to the latest ISO 9001:2000 quality standards as well as being tested using highly scientific machines to ensure their excellent quality.

SDS-Plus Dust Extraction Telescope

D25301D-XJ



For use with DeWALT corded and cordless SDS-Plus hammers
Ideal for dust free drilling up to 16 mm in diameter
Quick-fit system for easy tool free assembly and release
Tough and versatile to meet the needs of the most demanding applications with a compact design to maintain visibility and extremely light weight to minimise user fatigue

Standard Equipment: Side handle with dust extraction adaptation, Telescope and extraction head, Rubber hose, 43mm adaptor



Drilling Dust Extraction System & Hole Cleaning

DWH050K-XJ



Ideal for dust free drilling up to 52mm in diameter and unlimited depth
Compatible with all professional dust extractors
Durable rubber seal allows for adhesion to most masonry surfaces
Interchangeable drilling heads for optimum dust removal

Standard Equipment: Heavy duty kit box, 2x interchangeable drilling heads, 2x hole cleaning nozzles



Chiselling Dust Extraction System

DWH051K-XJ



Compatible with all DeWALT SDS-Max / 19mm HEX combination hammers and breakers
Accepts any DeWALT pointed, flat chisels and bushing tools and can be connected to any professional dust extractor
Quick release and tool free connection
3x different length flexible nozzles for optimum dust extraction

Standard Equipment: Heavy duty kit box, 3x interchangeable nozzles, 2x tool holder adaptors



Demolition Dust Extraction System

DWH052K-XJ



Compatible with all DeWALT demolition hammers and breakers
Accepts any DeWALT pointed, flat chisels and bushing tools up to 32mm wide and can be connected to any professional dust extractor
Fully adjustable, quick release and tool free connection
Impact resistant dust nozzle and flexible hose allows for maximum durability and long life

Standard Equipment: Heavy duty kit box



PERFORM & PROTECT



Industry leading DUST extraction solutions

- Airborne dust inhalation can lead to a number of long-term health conditions such as silicosis and chronic obstructive pulmonary disease (COPD).
- When the Perform & Protect shield is awarded for DUST, it is guaranteed the potential of inhaling dust is reduced to give a cleaner and safer working environment.

When you see the Perform & Protect shield, you know that the product is dedicated to your safety without compromising on performance or DeWALT's "GUARANTEED TOUGH" durability.



36V Cordless Dust Extraction System

D25302DH-XJ



Ideal for dust free drilling up to 16 mm in diameter with any DeWALT 36V SDS-Plus hammer
Powered by an independent motor maintaining maximum hammer performance with no decrease in durability
High quality washable HEPA filter capable of achieving 99.5% efficiency with dust particles as small as 0.3 microns
Quick release for easy tool free assembly

Standard Equipment: Cordless dust extraction system, Side handle with dust extraction adaptation, Telescope, extraction head and depth rod, Connector pipe, Large kit box



30L Construction Dust Extractor L Class

DWV900L-XE



L Classified to meet legislation
Compact durable design for ease of transportation and storage
Operates with a twin filter for maximum efficiency
Wet & Dry Operation

Standard Equipment: 2.4m x 35mm extraction hose, 35mm Airlock adaptor, Dust Bag

Power Input	1400 Watts
Max. Airflow	4080 l/min
Capacity	30 ltr
Wet/Dry Capacity	17.5 ltr
Weight	9.5 kg
Power Take Off Rating	1000 Watts



38L Construction Dust Extractor M Class

DWV902M-XE



M Classified to meet legislation
Innovative dual filter cleaning system maintains performance during tough construction applications
Constant suction power even with the finest concrete and wood dust
Each filter is automatically cleaned every 15 seconds reducing filter clogging and delivering constant air flow
Wet & Dry Operation

Standard Equipment: 4.6m x 32mm extraction hose, 35mm AirLock adapter, Stepped Rubber AirLock adapter, Dust bag

Power Input	1400 Watts
Max. Airflow	4080 l/min
Capacity	38 ltr
Wet/Dry Capacity	18.4 ltr
Weight	15 kg
Power Take Off Rating	1000 Watts



Attachments for Dust Extractors



Item	Cat. No.	Description	Compatible With
1	DE7901-XJ	Ward Kit	DWV902M / DWV900L
2	DWV9400-XJ	Plastic Tank Liner (5 pack)	DWV902M
3	DWV9402-XJ	Fleece Dust Bag (5 pack)	DWV902M / DWV900L
4	DWV9401-XJ	Paper Dust Bag (5 pack)	DWV902M / DWV900L
5	DWV9310-XJ	Replacement Filter (2 pack)	DWV902M Type 1
5	DWV9340-XJ	Replacement Filter (2 pack)	DWV902M Type 2 / DWV900L
6	DWV9315-XJ	4m Dust Extractor Hose	DWV902M / DWV900L
7	DWV9316-XJ	4m Anti-Static Dust Extractor Hose	DWV902M / DWV900L



Dust Connection Adaptors



Item	Cat. No.	Description
1	DWV9000-XJ	35mm Hose Connector
2	DWV9110-XJ	29/30/35mm Rubber Stepped Adaptor
3	DWV9120-XJ	35/38mm Rubber Stepped Adaptor
4	DWV9130-XJ	35mm Outer Diameter Adaptor
5	DWV9150-XJ	35mm Angled Adaptor
6	D279058CLXJ	Power Cord to Hose Clips (5 pack)

Dust Extraction to Power Tool Connection System
Easy to Use - Fast Click Connect to any Power Tool with a Dust Port



Dust Connection System Construction Kit

DWV9210-XJ



Standard Equipment:
1x DWV9000
1x DWV9130
1x DWV9120



Dust Connection System Woodworking Kit

DWV9220-XJ



Standard Equipment:
1x DWV9000
3x DWV9130
1x DWV9120
1x DWV9150
1x D279058CL



100mm - 800W Toggle Switch Angle Grinder

DWE4001-XE



Small girth allows comfortable gripping resulting in superior ergonomics
Independent box and spring brush holder design increases brush life
The low profile gear case allows access in confined areas
Fully loaded stator windings for increased motor durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and outer disc flange, Spanner

Power Input	800 Watts
No Load Speed	12000 rpm
Max. Disc Diameter	100 mm
Spindle Thread	M10
Weight	2.0 kg
Length x Height	270 x 80 mm



100mm - 900W Slide Switch Angle Grinder

DWE4100-XE



Small girth allows comfortable gripping resulting in superior ergonomics
Independent box and spring brush holder design increases brush life
The low profile gear case allows access in confined areas
Fully loaded stator windings for increased motor durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and outer disc flange, Spanner

Power Input	900 Watts
No Load Speed	12000 rpm
Max. Disc Diameter	100 mm
Spindle Thread	M10
Weight	2.0 kg
Length x Height	270 x 80 mm



115mm - 900W Slide Switch Angle Grinder

D28113-XE



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
Small girth allow comfortable gripping resulting in superior ergonomics
The low profile gear case allows access in confined areas
Anti vibration side handle to improve user comfort
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Standard Equipment: Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flange, Spanner

Power Input	900 Watts
No Load Speed	10000 rpm
Max. Disc Diameter	115 mm
Spindle Thread	M14
Weight	2.1 kg
Length x Height	285 x 80 mm



125mm - 900W Slide Switch Angle Grinder

DWE4151-XE



Small girth allows comfortable gripping resulting in superior ergonomics
Independent box and spring brush holder design increases brush life
The low profile gear case allows access in confined areas
Fully loaded stator windings for increased motor durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Standard Equipment: Protective guard, Multi-position side handle, Inner and outer disc flange, Hex Key

Power Input	900 Watts
No Load Speed	11800 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.05 kg
Length x Height	270 x 80 mm



125mm - 1250W Trigger Switch Angle Grinder (No Lock) D28065-XE



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
Ergonomic main handle with rubber grip allows for maximum comfort when grinding for long periods of time
Abrasion protected motor for increased durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1250 Watts
No Load Speed	9000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.6 kg
Length x Height	385 x 110 mm

Standard Equipment: Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



125mm - 1400W Slide Switch Angle Grinder D28135-XE



Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
Anti lock flange prevents flanges from permanently locking up and locking the disc on
Abrasion protected motor for increased durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1400 Watts
No Load Speed	10000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.5 kg
Length x Height	300 x 80 mm

Standard Equipment: Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



125mm - 1400W Paddle Switch Angle Grinder (No Lock) D28114N-XE



Complete electronic control provides multiple advanced technology features such as E-Clutch, Power Off & Power Loss Reset
Dust ejection system removes majority of debris from the air which passes over the motor, preventing abrasion and tracking
Abrasion protected motor for increased durability
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1400 Watts
No Load Speed	11000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.1 kg
Length x Height	330 x 110 mm

Standard Equipment: Protective keyless guard, Multi-position anti vibration side handle, Inner and outer disc flanges, Spanner



125mm - 1500W Slide Switch Angle Grinder (Variable Speed) D28136-XE



The electronic variable speed control offers added tool control and enables the tool to be used at optimum conditions to suit the accessory and material
Electro-mechanical clutch reduces the "kickback" transmitted to the operator if the cutting disc jams
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	1500 Watts
No Load Speed	2800 - 10000 rpm
Max. Disc Diameter	125 mm
Spindle Thread	M14
Weight	2.6 kg
Length x Height	315 x 90 mm

Standard Equipment: Protective keyless guard, Multi position anti vibration side handle, Inner and outer disc flanges, Spanner



180mm - 2400W Trigger Switch Heavy Duty Angle Grinder DWE4557-XE



Dust Ejection System protects from abrasion damage increasing the life of the tool
Fully loaded stator windings for increased motor durability
Three position side handle for improved balance in cutting and grinding applications
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	2400 Watts
No Load Speed	8500 rpm
Max. Disc Diameter	180 mm
Spindle Thread	M14
Weight	5.5 kg
Length x Height	520 x 151 mm

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and Outer disc flanges, Spanner



180mm - 2400W Trigger Switch Fully Featured Heavy Duty Angle Grinder (No Lock) DWE4597N-XE



Dust Ejection System protects from abrasion damage increasing the life of the tool
Overload protection will prevent the motor overheating by shutting off the unit until the unit cools down
Additional features such as soft start, Torque limiting electronic clutch, No volt release / No Lock switch maximises end user safety

Power Input	2400 Watts
No Load Speed	8500 rpm
Max. Disc Diameter	180 mm
Spindle Thread	M14
Weight	5.9 kg
Length x Height	520 x 151 mm

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and Outer disc flanges, Spanner



230mm - 2200W Trigger Switch Angle Grinder D28492K-XE



Abrasion protected motor for increased durability
Two position side handle allows the user to optimise handle position to give maximum comfort
Spindle lock for quick wheel changes
Brush window allows quick brush replacement

Power Input	2200 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	5.5 kg
Length x Height	490 x 151 mm

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and outer disc flanges, Spanner, Heavy duty kit box



230mm - 2400W Trigger Switch Heavy Duty Angle Grinder DWE4559-XE



Dust Ejection System protects from abrasion damage increasing the life of the tool
Fully loaded stator windings for increased motor durability
Three position side handle for improved balance in cutting and grinding applications
New guard design allows guard fitment, adjustment or removal without the use of tools, for increased flexibility

Power Input	2400 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	5.7 kg
Length x Height	520 x 151 mm

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and Outer disc flanges, Spanner



230mm - 2400W Trigger Switch Fully Featured Heavy Duty Angle Grinder (No Lock) DWE4599N-XE



Dust Ejection System protects from abrasion damage increasing the life of the tool
Overload protection will prevent the motor overheating by shutting off the unit until the unit cools down
Additional features such as soft start, Torque limiting electronic clutch, No volt release / No Lock switch maximises end user safety

Power Input	2400 Watts
No Load Speed	6500 rpm
Max. Disc Diameter	230 mm
Spindle Thread	M14
Weight	6.3 kg
Length x Height	520 x 151 mm

Standard Equipment: Protective keyless guard, Multi-position side handle, Inner and Outer disc flanges, Spanner



115-125mm Surface Grinding Shroud DWE46150-XJ



Allows collection of harmful dust during surface grinding applications
Attaches directly to 115, 125mm DeWALT Grinders with keyless clamp
Sliding section allows access to corners and surfacing to edge
AIRLOCK Compatible for quick, locking attachment to vac hose



180mm Surface Grinding Shroud DWE46170-XJ



Allows collection of harmful dust during surface grinding applications
Pivoting front section allows access to corners and surfacing to edge
Attaches directly to 180mm DeWALT Grinders with keyless clamp
AIRLOCK Compatible for quick, locking attachment to vac hose



6.35mm - 450W Slide Switch Die Grinder

DWE4884-XE



Long nose with rubber grip improves access and comfort
Hardened, precision-ground collet ensures that all attachments run perfectly true and concentrically
Cut-off brushes to prolong motor life
Ergonomic, lock-on slide switch for maximum flexibility

Standard Equipment: 6.35mm Collet, Spanner

Power Input	450 Watts
No Load Speed	25000 rpm
Collet Size	6.35 mm
Weight	1.6 kg
Length	356 mm



355mm Abrasive Chop Saw

D28710-XE



Horizontal handle for superior ergonomics and less user fatigue
Quick release clamp results in less time in changing the work piece
High power abrasion protected motor delivers high overload capabilities for greater durability
Spindle lock for quick and easy wheel change
Adjustable spark guard allows user to control the direction of the sparks coming from the machine

Standard Equipment: Hex key

Power Input	2200 Watts
Power Output	1350 Watt
No Load Speed	3800 rpm
Wheel Diameter	355 mm
Max. Cutting Capacity at 90° [Square Profile]	120 x 120 mm
Max. Cutting Capacity at 90° [Rectangular Profile]	115 x 130 mm
Max. Cutting Capacity at 90° [L-Shape Profile]	137 x 137 mm
Max. Cutting Capacity at 90° [Rounded Profile]	130 mm
Max. Cutting Capacity at 45° [Square Profile]	107 x 107 mm
Max. Cutting Capacity at 45° [Rectangular Profile]	115 x 107 mm
Max. Cutting Capacity at 45° [L-Shape Profile]	115 x 115 mm
Max. Cutting Capacity at 45° [Rounded Profile]	115 mm
Weight	17 kg
Length x Height	470 x 410 mm

355mm High Performance Abrasive Chop Saw

D28715-XE



Keyless blade clamp allows quick, hassle free blade change
Electronic soft start to limit start-up current and kick back reaction
High power abrasion protected motor delivers high overload capabilities for greater durability
Keyless mitre adjustments for quick and simple operations

Standard Equipment: Metal cutting disc, Hex key, Keyless blade clamp

Power Input	2200 Watts
Power Output	1350 Watt
No Load Speed	4000 rpm
Wheel Diameter	355x2.5 mm
Max. Cutting Capacity at 90° [Square Profile]	120x120 mm
Max. Cutting Capacity at 90° [Rectangular Profile]	100x200 mm
Max. Cutting Capacity at 90° [L-Shape Profile]	140x140 mm
Max. Cutting Capacity at 90° [Rounded Profile]	130 mm
Max. Cutting Capacity at 45° [Square Profile]	113x113 mm
Max. Cutting Capacity at 45° [Rectangular Profile]	100x140 mm
Max. Cutting Capacity at 45° [L-Shape Profile]	120x120 mm
Max. Cutting Capacity at 45° [Rounded Profile]	130 mm
Weight	18 kg
Length x Height	520 x 435 mm



355mm Tungsten Carbide Tipped Metal Cutting Chop Saw

DW872-XE



Burr-free cuts at constant cutting depth throughout the life of the blade
High power 2200 Watt motor with electronic soft start for metal cutting
Robust cool-running 355 mm, 70 tooth tungsten carbide tipped blade
Extra wide steel base for larger working area and increased stability

Standard Equipment: 355 mm metal carbide blade, Hex key, Auxiliary clamp

Power Input	2200 Watts
Power Output	1350 Watt
No Load Speed	1300 rpm
Wheel Diameter	355 mm
Max. Cutting Capacity at 90° [Square Profile]	100x100 mm
Max. Cutting Capacity at 90° [Rectangular Profile]	75x130 mm
Max. Cutting Capacity at 90° [L-Shape Profile]	92x92 mm
Max. Cutting Capacity at 90° [Rounded Profile]	130 mm
Max. Cutting Capacity at 45° [Square Profile]	79x79 mm
Max. Cutting Capacity at 45° [Rectangular Profile]	79x123 mm
Max. Cutting Capacity at 45° [L-Shape Profile]	56x56 mm
Max. Cutting Capacity at 45° [Rounded Profile]	79 mm
Weight	22.5 kg
Length x Height	525 x 430 mm



180mm Variable Speed Polisher

DWP849X-XE



Rubber overmoulded gearcase allows the user to grip the gearcase for greater comfort
Variable speed trigger allows the user to control the speed of the unit by adjusting the force applied to the switch
Large variable speed dial allows the user to easily change their speed to suit specific applications
Replaceable wool ingestion shields prevent wool from being sucked into the unit and blocking the tool

Standard Equipment: 180mm Velcro packing pad, 180mm Velcro wool bonnet, Bail side handle, Horizontal side handle

Power Input	1250 Watts
No Load Speed	0-600/3500 rpm
Max. Disc Diameter	150 & 180 & 230 mm
Spindle Thread	M14
Weight	3.0 kg
Length x Height	480 x 135 mm

DIAMOND EDGE CHOP SAW BLADE

KEY FEATURES



100X LIFE VS STANDARD
DeWALT CHOP SAW BLADES

Advanced Brazing Technology
Cuts metal with the speed of a conventional abrasive blade


Steel Blade Core
Constant cutting depth, capacity and stability of a solid core

Exposed Diamond Matrix
Also cuts concrete, plastic, fiberglass, rubber, non-ferrous metals and other soft materials without loading



DW8500

MATERIALS





6.35mm (1/4") Premium Plunge & Fixed Base Router Combination

D26204K-XE



Full wave electronic speed control with feedback ensures the selected speed is maintained under any load for a consistent finish in all grades of timber, aluminium and plastics
Variable speed control 16,000 to 27,000 which enables the router bit to be optimised for application
Compact, light weight design that increase ease of use and user comfort
Aluminium motor housing can be transitioned quickly to a fixed base attachment increasing the versatility of the machine

Standard Equipment: 2 x Parallel fences, 2 x Dust extraction adapter, 6.35mm Collet (1/4"), 17 mm spanner, Plunge and Fixed base, Centering cone, Heavy Duty kit box

Power Input	900 Watts
Power Output	620 Watt
No Load Speed	16000-27000 rpm
Plunge Stroke/Movement	55 mm
Collet Size	6-8 mm
Max. Cutter Diameter	36 mm
Weight	2.9 kg
Length x Height	110 x 270 mm



12.7mm (1/2") Variable Speed Plunge Router

DW621-XE



Unique through the column dust extraction for excellent cutter visibility - no adaptor or hose which restrict visibility is required
Full wave electronic speed control with feedback ensures the selected speed is maintained under any load for a consistent finish in all grades of timber, aluminium and plastics
Two column precision guide with phosphor bronze bushing - the extra broad column provides superior rigidity for the greatest accuracy in this size of router
Power switch located in the handle for ease of use features lock off and lock on actions

Power Input	1100 Watts
Power Output	620 Watt
No Load Speed	8000-24000 rpm
Plunge Stroke/Movement	55 mm
Collet Size	6-12.7 mm
Max. Cutter Diameter	36 mm
Weight	3.1 kg
Length x Height	165 x 325 mm

Standard Equipment: Parallel fence with fine adjustment, Dust extraction adapter and cap, 12.7mm collet (1/2"), 17/10mm spanner



2.5 mm Planer

DW680-XE



Low weight and perfect balance make this planer ideal for single handed use in awkward applications
Front handle depth control in clearly marked 0.1 mm steps for accurate setting with a positive stop position
High power motor for smooth results, even in hard woods
3 different size chamfering grooves in the front shoe simplify precision fitting jobs

Standard Equipment: Tungsten carbide tipped reversible blades, Parallel fence, Dust extraction adapter

Power Input	600 Watts
Power Output	350 Watt
No Load Speed	15000 rpm
Maximum Depth of Cut	2.5 mm
Rebating Depth	12 mm
Planer Width	82 mm
Shoe Length	290 mm
Drum Diameter	54 mm
Weight	3.2 kg
Length x Height	290 x 170 mm



4 mm Planer

D26500K-XE



A powerful planer that copes effortlessly with hard woods, even at maximum depth of cut, giving a smooth, consistent finish
Left and right chip ejection for convenience
Front handle depth control in clearly marked 0.1 mm steps for accurate setting with positive indexing
3 chamfering grooves in the front shoe simplify precision fitting jobs

Standard Equipment: Tungsten carbide tipped reversible blades, Parallel fence, Rebate depth guide, Dust extraction spout, Chip ejector, Heavy Duty kit box

Power Input	1050 Watts
Power Output	620 Watt
No Load Speed	13500 rpm
Maximum Depth of Cut	4 mm
Rebating Depth	25 mm
Planer Width	82 mm
Shoe Length	320 mm
Drum Diameter	64 mm
Weight	4.0 kg
Length x Height	320 x 180 mm



Biscuit Joiner

DW682K-XE



Rack and pinion control provides precise vertical adjustment and fence alignment
Pre-set cutting depths for 0, 10 and 20 biscuit sizes with additional fine adjustment for ultimate accuracy
Grooving setting with up to 20 mm depth of cut gives increased versatility
Anti slide grippers, eight guiding notches and fence window to aid accurate cuts

Standard Equipment: Tungsten carbide tipped grooving cutter, Shavings bag, Spanner, 35 mm Dust extraction spout, Heavy duty kit box

Power Input	600 Watts
Power Output	335 Watt
No Load Speed	10000 rpm
Max. Cutter Diameter	100 mm
Max. Cutting Depth	20 mm
Fence adjustment	0-90 °
Joint Groover Setting	4 mm
Weight	3.0 kg
Length x Height	320 x 150 mm



¼ Sheet Orbital Palm Grip Sander

D26441K-XE



230 Watt motor sands at 14,000 orbits per minute, providing a superior finish
Sealed 100% ball-bearing construction provides longer life
Dual plane counter-balance low-vibration design reduces user fatigue
Textured anti-slip top and body grip provides ultimate comfort and control during prolonged use

Standard Equipment: Dust bag with built-in extractor connection, Heavy Duty kit box

Power Input	230 Watts
Power Output	120 Watt
Rotation speed	14000 rpm
Orbits Per Minute	28000 opm
Orbit Size	1.4 mm
Paper Size	140x115 mm
Pad Size	108x115 mm
Weight	1.4 kg
Length x Height	130 x 160 mm



125 mm Random Orbit Palm Grip Sander

D26453K-XE



Controlled finishing system controls pad speed and minimises gouging during start up
Compact palm grip design
Sealed 100% ball-bearing construction provides longer life
Dust-sealed switch prevents contamination

Standard Equipment: Fabric dust bag with built-in extractor ports, Heavy Duty kit box

Power Input	280 Watts
Power Output	120 Watt
Rotation speed	7000-12000 rpm
Orbits Per Minute	14000-24000 opm
Orbit Size	2.4 mm
Paper Size	125 mm
Weight	1.6 kg
Length x Height	130 x 160 mm



2000W Digital LED Heatgun

D26414K-XE



Durable hot air gun for Professional applications
Excellent temperature control and memory setting for consistent temperature requirements
2000 Watt power with optimised cooling
Compact and lightweight for easy handling and use

Standard Equipment: Cone nozzle, Fish tail surface nozzle, 10 other common accessories, Heavy duty kit box

Power Input	2000 Watts
Operating Temperature	50-600 °C
Air Flow	650 l/min
Weight	0.85 kg



The majority of products shown are available within ANZ.



SAWING

SAWING

GUARANTEED TOUGH.

Multi-Tool

DWE315KT-XE



Quick accessory change & adjustment, no Hex Key required
Superior Ergonomics
0 - 22,000 apm Variable Speed Trigger for ultimate control
Oscillating angle 1.6°
Integrated LED Light
Design allows the use of Dust Port & Depth Stop

Standard Equipment: Oscillating Wood with Nails Blade, Oscillating Rigid Scraper, Oscillating Sanding Platen, Sanding Sheets (25 pcs Assorted Grades), Universal Adaptor, 5mm Hex Key, Heavy duty TStak kit box

Power Output	300 Watt
Speed	0-22,000 min ⁻¹
Weight	1.475 kg
Switch Type	Trigger
Tool free Accessory Fitment	Yes
Bosch Accessory Fitment Adapter	Yes
'Lock on' switch	Yes

701W Heavy Duty Top Handle Jigsaw

DW331K-XE



Quick and easy patented keyless blade change system accepts T-shank blades
Powerful 701 Watt motor with variable speed delivers fast cutting action up to 3100 strokes per minute
Patented anti-vibration counterbalance mechanism and rubber grip provide smooth operation
4-position pendulum action controls the aggressiveness or smoothness of cuts

Standard Equipment: Anti-scratch cover, Anti-splinter insert, Dust extraction adapter, Heavy duty kit box

Power Input	701 Watts
Power Output	445 Watt
No Load Stroke Rate	0-3100 spm
Stroke Length	26 mm
Bevel Capacity	45 °
Max. Cutting Capacity (Wood)	130 mm
Max. Cutting Capacity (Steel)	12 mm
Max. Cutting Capacity (Non Ferrous Metal)	30 mm
Weight	2.8 kg
Length x Height	250 x 210 mm



184mm (7 1/4") 1350W Circular Saw

DWE560-XE



Compact, Lightweight, Easy to use circular saw with 65mm depth of cut
High power 1350W motor gives increased cutting performance
Cutaway inner guard gives improved line of sight to cutting line
Dust blower clears dust and debris from cut line

Standard Equipment: 36 tooth saw blade, Rip Fence, Blade spanner, Dust Extraction Spout

Power Input	1350 Watts
Power Output	850 Watt
No Load Speed	5500 rpm
Blade Diameter	184 mm
Blade Bore	20 mm
Bevel Capacity	48 °
Weight	3.7 kg
Length x Height	286 x 226 mm



184mm (7 1/4") 1600W Circular Saw

DWE575-XE



Scale for precise cutting depth setting to 65 mm
General purpose ripping, cross-cutting and bevelling circular saw for wood and other construction materials
High torque motor for durability and power for cutting job site and joinery materials
Stable block construction for low vibration running and long service life

Standard Equipment: Precision 36 tooth saw blade, Rip Fence, Blade Spanner, Dust Extraction Spout

Power Input	1600 Watts
Power Output	1000 Watt
No Load Speed	5200 rpm
Blade Diameter	184 mm
Blade Bore	20 mm
Bevel Capacity	57 °
Weight	4.0 kg
Length x Height	355 x 245 mm



1050W - Reciprocating Saw

DWE357-XE



Compact Design at only 368mm in length, easy access when cutting in tight areas and more flexibility of applications
 Lightweight and balanced for additional control at only 3.1kg
 4 position blade clamp allows for flush cutting and increased versatility
 Lever-action keyless blade clamp for quick and easy blade changing
 1050 watt motor, designed for Heavy Duty applications
 With a 29 mm stroke length & 0-2,800 SPM, the DWE357K delivers excellent cutting performance

Power Input	1050 Watts
Power Output	525 Watt
No Load Stroke Rate	0-2800 spm
Stroke Length	29 mm
Max. Cutting Capacity [Wood]	280 mm
Max. Cutting Capacity [Steel Sections & Pipes]	100 mm
Max. Cutting Capacity [PVC]	130 mm
Weight	3.1 kg
Length x Height	365 x 200 mm



1050W - Reciprocating Saw

DW304PK-XE



1050 Watt motor designed for heavy duty applications
 4 position blade clamp allows for flush cutting and increased versatility
 With a 29 mm stroke length, the DW304PK delivers excellent cutting performance
 Lever-action keyless blade clamp for quick and easy blade changing

Standard Equipment: Heavy duty kit box

Power Input	1050 Watts
Power Output	525 Watt
No Load Stroke Rate	0-2800 spm
Stroke Length	29 mm
Max. Cutting Capacity [Wood]	280 mm
Max. Cutting Capacity [Steel Sections & Pipes]	100 mm
Max. Cutting Capacity [PVC]	130 mm
Weight	3.5 kg
Length x Height	435 x 178 mm



1200W - Heavy Duty Reciprocating Saw

DW311K-XE



1200 Watt motor delivers increased power for heavy duty applications
 Orbital action delivers fast cutting in wood applications
 0-2,600 SPM and 28 mm stroke length for fast and efficient cutting
 Keyless adjustable shoe easily adjusts depth of cut and extends the blade life

Standard Equipment: Heavy duty kit box

Power Input	1200 Watts
Power Output	630 Watt
No Load Stroke Rate	0-2600 spm
Stroke Length	28 mm
Max. Cutting Capacity [Wood]	300 mm
Max. Cutting Capacity [Steel Sections & Pipes]	130 mm
Max. Cutting Capacity [PVC]	160 mm
Weight	4.0 kg
Length x Height	460 x 60 mm



2X
LONGER LIFE

2X LONGER LIFE RECIPROCATING SAW BLADE

STRONG AND FAST.

This blade stands up to the test and the heat and keeps cutting long after the competition has given up.



• Longer Life

Proprietary coatings, steel construction, tooth geometry and blade thickness help to reduce heat build-up

• Outstanding Durability

Thick and wide blade

• Efficient Cutting Performance

Variable pitch 14/18 TPI

HARD METALS





TOUGHSYSTEM™

A mobile, modular storage system with unbeatable toughness, performance and protection

- 4mm thick reinforced polypropylene plastic
- Heavy duty metal latches and metal hinges
- Dust tight and water jet resistant (IP65) to withstand the most severe weather conditions

TOUGHSYSTEM™ DS150

1-70-321


Removable cups for small parts storage and also suitable for power tools and chargers
 Interior bits & accessories compartments
 Bi material handles for comfort grip and carrying when stacked
 Pressure relief valve - enables equalisation of the pressure inside and outside the unit
 5/32 inch wall thickness for rigid structure
 Latches connect the units for stackability
 Dust tight and water jet resistant (IP65)
 Padlock eyes
 Dimensions - 158mm x 336mm x 550mm (MAX Load 30kg)

TOUGHSYSTEM™ DS300

1-70-322


Removable vertical organization unit
 Pressure relief valve - enables equalisation of the pressure inside and outside the unit
 Bi material handles for comfort grip and carrying when stacked
 5/32 inch wall thickness for rigid structure
 Latches connect the units for stackability
 Dust tight and water jet resistant (IP65)
 Padlock eyes
 Dimensions - 308mm x 336mm x 550mm (MAX Load 40kg)

TOUGHSYSTEM™ DS400

1-70-323


Extra deep tray for batteries and chargers (optional)
 Removable vertical organization unit
 Bi material handles for comfort grip and carrying when stacked
 Pressure relief valve - enables equalisation of the pressure inside and outside the unit
 5/32 inch wall thickness for rigid structure
 Latches connect the units for stackability
 Dust tight and water jet resistant (IP65)
 Padlock eyes
 Dimensions - 408mm x 336mm x 550mm (MAX Load 50kg)

TOUGHSYSTEM™ DSCARRIER

1-70-324


Metal trolley for loading materials and heavy loads
 Adjustable height, foldable brackets allow tailored configuration.
 Can carry up to 132 lbs per pair
 Central locking mechanism secures the units to the frame
 Back compartment for longer tools such as a 26 inch saw
 8 inch rubber wheels
 Scoop max load 330 lbs

Spare Brackets Available (Pair): 1-70-362



TOUGHSYSTEM™ 4 in 1

1-70-349


Professional tool storage units with a combination of space for large power tools and small compartments for your smaller tools, nails screws and drills.
 Durable steel chassis carries rigid tool boxes and enables to easily adjust them according to the needed height.
 Secure system with central locking and protection of tools from water and dust tested for IP65* standard
 Customize your DeWALT TOUGH SYSTEM to suit your needs; build it up to your work and take only what you need.
 Long lasting: you want to make sure your equipment is well stored, well organized and accessible, but mostly you probably prefer to choose one solution that will endure the hardships of the daily work, weather conditions and rough terrain.

MITRE SAWS



MITRE SAWS

GUARANTEED TOUGH.

216mm (8") Single Bevel, Sliding Compound Mitre Saw

DW777-XE



		
90°/90°	270 x 60 mm	265 x 62 mm
45°/90°	190 x 60 mm	189 x 62 mm
90°/45°	270 x 48 mm	173 x 62 mm
45°/45°	190 x 48 mm	190 x 48 mm

The classic pull saw design improved and updated for the modern user
New 1800 Watt motor for powerful cutting in all materials (1600Watt 110V LX version UK Only)
The base and fence have been machined to meet the accuracy requirements of the most demanding applications
Compact internal rail design for huge cutting capacity in a highly transportable format

Standard Equipment: 24 tooth saw blade, 2 bench mounting bolts, Blade spanner, Material Clamp



Power Input	1800 Watts
Power Output	1100 Watt
Blade Speed	6300 rpm
Blade Diameter	216 mm
Blade Bore	30 mm
Bevel Capacity	48°
Mitre Capacity (right/left)	50°/50°
Weight	14.0 kg
Depth	550 mm
Length x Height	490 x 590 mm



254mm (10") Single Bevel, Fixed Head Compound Mitre Saw

DW713-XE



		
90°/90°	95 x 89	162 x 41
45°/90°	67 x 89	114 x 41
90°/45°	95 x 61	162 x 25
45°/45°	114 x 25	114 x 25

Powerful universal motor delivers plenty of cutting power in high torque cutting applications
Compact with lock down motor head for effortless transportation
Extremely lightweight unit with rugged construction for maximum jobsite versatility

Standard Equipment: 24 tooth saw blade, Dust bag, Blade spanner



Power Input	1600 Watts
Power Output	1000 Watt
Blade Speed	5000 rpm
Blade Diameter	254 mm
Blade Bore	25.4 mm
Bevel Capacity	48°
Mitre Capacity (right/left)	50°/50°
Weight	13.6 kg
Depth	485 mm
Length x Height	600 x 425 mm



254mm (10") Double Bevel, Sliding Compound Mitre Saw

DW717-XE



		
90°/90°	320 x 76 mm	302 x 88 mm
45°/90°	226 x 76 mm	213 x 88 mm
90°/45°	320 x 50 mm	302 x 58 mm
45°/45°	226 x 50 mm	226 x 50 mm

Compact and lightweight design characteristics deliver a saw with enormous capacity which is easy to transport around the jobsite
Linear horizontal rails utilise bronze guides to provide maximum precision when cutting materials up to 320 mm wide
The large dual sliding fence gives maximum support in large material cuts at any angle or combination of angles. This provides maximum stability and accuracy.

Standard Equipment: 60 tooth blade, Blade spanner, Dust bag, Material Clamp

Power Input	1675 Watts
Power Output	750 Watt
Blade Speed	4000 rpm
Blade Diameter	254 mm
Blade Bore	25.4 mm
Bevel Capacity	48/48°
Mitre Capacity (right/left)	50°/60°
Weight	23 kg
Depth	541 mm
Length x Height	718 x 442 mm

305mm (12") Double Bevel, Sliding Compound Mitre Saw

DWS780-XE




Outstanding cutting performance in both small profiles and large construction timbers up to 110 x 303 mm
XPS Shadow line cut indicator provides fast accurate alignment of the blade while illuminating the work piece for increased productivity. No adjustment required
Heavy duty durability with the ability to fully adjust your machine to maintain accuracy over the life of the tool.
New quick release bevel stop setting provides accurate and simple setting of bevel angles up to 49° left and right

Standard Equipment: High Quality 60 tooth blade, Blade spanner, Dust bag, Material Clamp

Power Input	1675 Watts
Power Output	960 Watt
Blade Speed	3800 rpm
Blade Diameter	305 mm
Blade Bore	25.4 mm
Bevel Capacity	49/49 °
Mitre Capacity (right/left)	60/50 °
Weight	24.8 kg
Depth	470 mm
Length x Height	770 x 396 mm



90°/90°	303 x 110 mm	345 x 76 mm
45°/90°	268 x 63 mm	354 x 44 mm
90°/45°	211 x 112 mm	244 x 76 mm



Mitre Saw Workstation



Cat. No.	Fits	Description
DWX723-XE	All DeWALT mitre saws	Heavy Duty Mitre Saw Workstation

- Accommodates all DeWALT mitre saws
- Lightweight aluminium construction provides portability in and around the jobsite
- 1.7 metre beam extends to support up to 3.9 metres for use with large workpieces
- The beam can support up to 182 kg providing maximum flexibility and capacity
- Work stops can be converted into end stops for repetitive cutting to length
- Integral folding legs avoids unnecessary assembly
- Integrated carry handle provides ease of transportation

Attachments For DWX723



Cat. No.	Item	Description
DW7232	1	Work support (each)
DW7231	2	Mounting bracket (pair)
DE7027-XJ	3	Roller work support (each)



2X
LARGER
CARBIDE*

PRECISION TRIM SAW BLADE

- **Exclusive Plate Technology**
Reduces vibration, improving cut performance
- **Advanced Tooth Grind**
For clean, precise cuts
- **Premium C4 Woodworking Grade Carbide**
2X larger carbide than DeWALT construction series

-Tough Coat®
FINISH REVESTIMENTO / REVESTIMENT
Anti-stick coating





Heavy Duty Electronic Portable Table Saw

DWE7491-XE



Steel roll cage protects saw against jobsite drops and impacts
Rack and pinion fence system, front and rear fence lock and large, clear scales combine to give an extremely accurate and easy to use saw
Cast table top design ensures accuracy and precision
Overload protection system ensures powerful performance in hard, wet or frozen woods

Standard Equipment: 24 tooth SERIES 40® saw blade, Mitre fence, 2 blade spanners, Parallel fence, Dust port reducer, Push stick

Power Input	2000 Watts
Power Output	970 Watt
Blade Speed	3800 rpm
Blade Diameter	254 mm
Blade Bore	16 mm
Bevel Capacity	-3 to 48 °
Max. Ripping Capacity (right)	825 mm
Max. Ripping Capacity (left)	558 mm
Table Size	670 x 630 mm
Weight	26.6 kg
Depth	742 mm
Length x Height	577 x 425 mm

Scissor Stand Available: DWE74912-XJ



Heavy Duty Rolling Workstation

DWE74911-XJ



Large Heavy-Duty wheels designed to easily roll over steps, kerbs, and jobsite debris
Folding legs with quick release levers which retract under the stand in a few seconds for easy and quick transport
Lightweight construction which improves the portability
Heavy-Duty kick stand allows the stand to balance upright for mobility and storage

For Use with DWE7491 Table Saws

Heavy Duty Rolling Universal Workstation

DE7400-XJ




Large Heavy-Duty wheels designed to easily roll over steps, kerbs, and jobsite debris
Folding legs with quick release levers which retract under the stand in a few seconds for easy and quick transport
Lightweight aluminium construction which improves the portability
Heavy-Duty kick stand allows the stand to balance upright for mobility and storage

Standard Equipment: Universal Brackets to attach most Table saws

300mm Radial Arm Saw

DW721KN-XE



Free standing radial arm saw with 507mm of crosscut capacity and 90 mm depth of cut
Solid cast iron arm and four roller bearings in the motor head assembly ensure high accuracy and durability
Quiet maintenance free induction motor delivers high power even at the maximum cutting capacities of the machine. Also available in three phase voltage as a DW722KN
Simple yet positive controls and adjustment scales enable the width, depth and angle of cut to be set with accuracy in seconds

Standard Equipment: 32 tooth saw blade, Assembly tools, Automatic safety return, Blade brake, Legstand

Power Input	2000 Watts
Power Output	1580 Watt
Blade Speed	3000 rpm
Blade Diameter	300 mm
Blade Bore	30 mm
Max. Cutting Speed	36 m/sec
Max. Ripping Width	N/A mm
Weight	115 kg
Depth	1200 mm
Length x Height	1490 x 1470 mm



317 mm Portable Thicknesser

DW734-XE

4 post column design allows the cutter head to move up and down smoothly and accurately
Large infeed and outfeed tables provide added material support when cutting large materials to improve the surface finish
Powerful 1800 Watt motor makes large surface planing easy
Designed for portability on the job site and in small workshops

Standard Equipment: Allen key, Blade spanner, Blade changing guides

Power Input	1800 Watts
No Load Speed	10000 rpm
Max. Capacity	317 mm
Max. Planing Depth	3 mm
Max. Thicknesser Capacity	152 mm
Feed Rate	8 m/min
Weight	38 kg



330 mm Portable Thicknesser

DW735-XE

Two speed gear box allows users to change feed speed to optimise cuts per inch
Large infeed and outfeed tables provide added material support when cutting large materials to improve the surface finish
Powerful 1800 Watt motor makes large surface planing easy
Designed for portability on the job site and in small workshops

Standard Equipment: Allen key, Blade spanner, Blade changing guides

Power Input	1800 Watts
No Load Speed	10000 rpm
Max. Capacity	330 mm
Max. Planing Depth	3 mm
Max. Thicknesser Capacity	152 mm
Feed Rate	4.8 m/min
Weight	42 kg



DeWALT®




ACCESSORIES

YOUR PREMIUM DeWALT TOOLS DESERVE THE RIGHT ACCESSORY

USING PROFESSIONAL QUALITY ACCESSORIES WILL IMPROVE THE PERFORMANCE OF YOUR TOOL



ICON REFERENCE

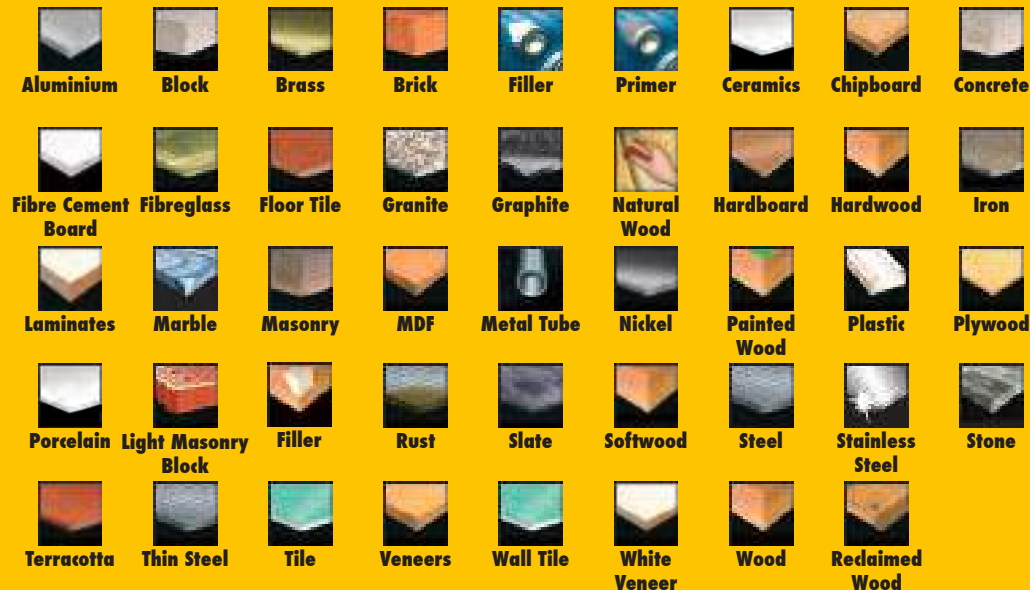

MASONRY DRILLING

GUARANTEED TOUGH.

EXTREME DeWALT® MASONRY DRILL BITS



APPLICATIONS

- Typically used for drilling anchor, plastic plug, fixing or pipework clearance holes.
- Suitable for masonry, brick, stone, tiles and light concrete.

FEATURES

- Lasts up to 2x longer and delivers up to 50% more holes per charge than a standard masonry bit.
- Unique Carbide Grade - optimum grade maximises durability.



SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT6671-QZ	4	75	50	1	1	5035048060568
DT6672-QZ	5	85	50	1	1	5035048060575
DT6675-QZ	6	100	60	1	1	5035048060605
DT6677-QZ	6	200	150	1	1	5035048060629
DT6679-QZ	6.5	150	100	1	1	5035048060643
DT6680-QZ	7	100	60	1	1	5035048060650
DT6682-QZ	8	120	80	1	1	5035048060674
DT6683-QZ	8	200	150	1	1	5035048060681
DT6684-QZ	9	120	80	1	1	5035048060698
DT6685-QZ	10	120	80	1	1	5035048060704
DT6686-QZ	10	200	150	1	1	5035048060711
DT6687-QZ	12	150	100	1	1	5035048060728
DT6688-QZ	12	200	150	1	1	5035048060735
DT6689-QZ	13	150	100	1	1	5035048060742
DT6690-QZ	14	150	100	1	1	5035048060759
DT6691-QZ	14	200	150	1	1	5035048060766
DT6692-QZ	16	150	100	1	1	5035048060773

EXTREME DeWALT® MASONRY DRILL BIT SETS



EXTREME DeWALT® MASONRY DRILL BIT SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7928B-QZ	19	Masonry drill bits: 4, 5, 5.5, 6, 7, 8mm Ph2x4, Pz2x4, Ph2x50mm, Pz2x50mm, Slotted 5.5x50mm, Magnetic holder, Magnetic drive guide	1	5035048072264

EXTREME MASONRY DRILL BITS



Extreme DeWALT Masonry Drill Bits offer class-leading percussion drilling performance:

- Last up to 2x longer than a standard masonry bit
- Optimum carbide grade maximizes durability
- Ideal for drilling for anchors, plastic fixings, and pipe-work clearance holes

MULTI-MATERIAL DRILL BITS

APPLICATIONS

- Suitable for wood, plastics, mild steel and non ferrous metals and masonry.
- For use in rotary or percussion drilling modes.

FEATURES

- Unique 120° tip grind for maximum sharpness.
- Fully supported carbide head gives faster drilling and extended life.
- Non slip shank ensures better retention in chuck.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT6517-QZ	4	103	73	1	1	5035048066034
DT6518-QZ	5	113	83	1	1	5035048066041
DT6528-QZ	5.5	200	170	1	1	5035048077511
DT6519-QZ	6	123	93	1	1	5035048066058
DT6529-QZ	6	200	170	1	1	5035048077528
DT6520-QZ	6.5	123	93	1	1	5035048066065
DT6530-QZ	6.5	200	170	1	1	5035048077535
DT6522-QZ	8	134	104	1	1	5035048066089
DT6531-QZ	8	200	170	1	1	5035048077542
DT6523-QZ	9	134	104	1	1	5035048066096
DT6524-QZ	10	134	104	1	1	5035048066102
DT6533-QZ	10	200	170	1	1	5035048077559
DT6525-QZ	12	153	123	1	1	5035048066119
DT6526-QZ	13	160	130	1	1	5035048066126

SDS-PLUS EXTREME DeWALT® 2 DRILL BITS

APPLICATIONS

- Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FEATURES

- The innovative EXTREME DeWALT® 2 SDS-Plus drill bit is amongst the very best in terms of its durability, drilling life and speed.
- The Superior carbide grade ensures a tip with outstanding durability which gives consistent drilling life.
- The NEW 4 FLUTE SPIRAL incorporates a maximized central core for increased durability and energy transmission.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT9504-QZ	5	110	50	1	1	5035048054796
DT9505-QZ	5	160	100	1	1	5035048054802
DT9506-QZ	5	210	150	1	1	5035048054819
DT9508-QZ	5.5	110	50	1	1	5035048054833
DT9509-QZ	5.5	160	100	1	1	5035048054840
DT9514-QZ	6	110	50	1	1	5035048054895
DT9515-QZ	6	160	100	1	1	5035048054901
DT9516-QZ	6	210	150	1	1	5035048054918
DT9519-QZ	6.5	110	50	1	1	5035048054949
DT9520-QZ	6.5	160	100	1	1	5035048054956
DT9521-QZ	6.5	210	150	1	1	5035048054963
DT9525-QZ	7	160	100	1	1	5035048055007
DT9528-QZ	8	110	50	1	1	5035048055038
DT9529-QZ	8	160	100	1	1	5035048055045
DT9540-QZ	10	160	100	1	1	5035048055151
DT9541-QZ	10	210	150	1	1	5035048055168
DT9552-QZ	12	160	100	1	1	5035048055274
DT9553-QZ	12	200	150	1	1	5035048055281
DT9554-QZ	12	260	200	1	1	5035048055298
DT9557-QZ	12	450	400	1	1	5035048055328
DT9560-QZ	13	160	100	1	1	5035048055359
DT9566-QZ	14	160	100	1	1	5035048055410
DT9567-QZ	14	200	150	1	1	5035048055427

SDS-PLUS EXTREME DeWALT® 2 DRILL BITS

APPLICATIONS

- Suitable for fast drilling of plug, anchor or clearance holes in masonry, stone, concrete and brick/block work.

FEATURES

- The innovative EXTREME DeWALT® 2 SDS-Plus drill bit is amongst the very best in terms of its durability, drilling life and speed.
- The Superior carbide grade ensures a tip with outstanding durability which gives consistent drilling life.
- The NEW 4 FLUTE SPIRAL incorporates a maximized central core for increased durability and energy transmission.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT9579-QZ	16	200	150	1	1	5035048055540
DT9581-QZ	16	300	250	1	1	5035048055564
DT9582-QZ	16	450	400	1	1	5035048055571
DT9585-QZ	16	1000	950	1	1	5035048055601
DT9587-QZ	18	200	150	1	1	5035048055625
DT9589-QZ	18	300	250	1	1	5035048055649
DT9590-QZ	18	450	400	1	1	5035048055656
DT9597-QZ	20	200	150	1	1	5035048055724
DT9598-QZ	20	300	250	1	1	5035048055731
DT9599-QZ	20	450	400	1	1	5035048055748
DT9602-QZ	22	250	200	1	1	5035048055779
DT9604-QZ	22	450	400	1	1	5035048055793
DT9609-QZ	24	250	200	1	1	5035048055847
DT9611-QZ	25	250	200	1	1	5035048055861
DT9613-QZ	25	450	400	1	1	5035048055885
DT9616-QZ	26	450	400	1	1	5035048055915

EXTREME DeWALT® DRILL BIT SETS

SDS-PLUS EXTREME DeWALT® 2 DRILL BIT SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT9700-QZ	4	5, 6, 8, 10mm	1	5035048056400
DT9701-QZ	7	5, 6x2, 8x2, 10, 12mm	1	5035048056417

SDS-PLUS CHISELS

APPLICATIONS

- For light chipping and chiselling of tile, mortar, glazing compounds and other masonry products for hammers with a rotation stop feature.

SINGLE PACKS

Cat. No.	Description	Width mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT6801-QZ	Pointed	-	250	1	1	5011402371426
DT6802-QZ	Flat	20	250	1	1	5011402371433
DT6805-QZ	Hollow/Gauge	22	240	1	1	5011402371464
DT6806-QZ	Tile Chisel	40	200	1	1	5011402371471

EXTREME DeWALT® XLR FULL HEAD CARBIDE SDS-PLUS DRILL BITS

APPLICATIONS

- Suitable for drilling plug & anchor holes in masonry, all types of stone and concrete.

FEATURES

- New solid carbide drill tip with optimised 4 cutter geometry offers the highest levels of drill bit life and durability.
- 4 cutter geometry drills a more concentric hole to offer the best fixing retention.
- 4 flute spiral aids consistent drilling speed and efficient debris removal.


SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT8907-QZ	5	110	50	1	1	5035048077689
DT8908-QZ	5	160	100	1	1	5035048077696
DT8909-QZ	5	210	150	1	1	5035048077702
DT8910-QZ	5.5	110	50	1	1	5035048077719
DT8911-QZ	5.5	160	100	1	1	5035048077726
DT8912-QZ	6	110	50	1	1	5035048077733
DT8913-QZ	6	160	100	1	1	5035048077740
DT8914-QZ	6	210	150	1	1	5035048077757
DT8916-QZ	6.5	160	100	1	1	5035048077771
DT8917-QZ	6.5	210	150	1	1	5035048077788
DT8918-QZ	6.5	260	200	1	1	5035048077795
DT8920-QZ	7	160	100	1	1	5035048077818
DT8921-QZ	7	210	150	1	1	5035048077825
DT8922-QZ	8	110	50	1	1	5035048077832
DT8923-QZ	8	160	100	1	1	5035048077849
DT8924-QZ	8	210	150	1	1	5035048077856
DT8925-QZ	8	260	200	1	1	5035048077863
DT8927-QZ	8	460	400	1	1	5035048077887
DT8928-QZ	10	160	100	1	1	5035048077894
DT8929-QZ	10	210	150	1	1	5035048077900
DT8930-QZ	10	260	200	1	1	5035048077917
DT8932-QZ	10	460	400	1	1	5035048077931
DT8933-QZ	12	160	100	1	1	5035048077948
DT8934-QZ	12	200	150	1	1	5035048077955
DT8935-QZ	12	260	200	1	1	5035048077962
DT8937-QZ	12	460	410	1	1	5035048077986

EXTREME DeWALT® XLR FULL HEAD CARBIDE SDS-PLUS DRILL BITS

EXTREME DeWALT® FULL HEAD CARBIDE SDS-PLUS DRILL BIT SET

Cat. No.	Pieces.	Description	M.O.Q.	Barcode
DT8977B-QZ	10	5, (6x110)x2, (6x160)x2, 6.5, 8x2, 10, 12mm	1	5035048078358

SDS-MAX DRILL BITS

APPLICATIONS

- For use with SDS-MAX drive hammer drills (Hilti type F, G or Y) for anchor, fixing or clearance holes in masonry, concrete, brick or block work.

FEATURES

- 4 flute spiral with maximum flute entry enables faster debris removal.
- Maximised central core enables more efficient energy transmission to the drill bit head.
- Fully supported carbide head gives longer life and cleaner, more concentric holes for better fixing retention.
- Open head design ensures faster drilling.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Cutters	Pack Qty.	M.O.Q.	Barcode
DT9400-QZ	12	340	200	2	1	1	5035048059678
DT9401-QZ	12	540	400	2	1	1	5035048059685
DT9403-QZ	13	340	200	2	1	1	5035048059708
DT9404-QZ	13	540	400	2	1	1	5035048059715
DT9409-QZ	16	340	200	4	1	1	5035048059760
DT9410-QZ	16	540	400	4	1	1	5035048059777
DT9411-QZ	18	340	200	4	1	1	5035048059784
DT9412-QZ	18	540	400	4	1	1	5035048059791
DT9416-QZ	20	340	200	4	1	1	5035048059838
DT9417-QZ	20	540	400	4	1	1	5035048059845
DT9422-QZ	24	340	200	4	1	1	5035048059890
DT9423-QZ	24	540	400	4	1	1	5035048059906
DT9433-QZ	30	570	450	4	1	1	5035048059901
DT9435-QZ	32	570	450	4	1	1	5035048059925
DT9442-QZ	38	570	450	4	1	1	5035048059994
DT9444-QZ	40	380	250	4	1	1	5035048059117
DT9445-QZ	40	570	450	4	1	1	5035048059124


SDS-MAX CHISELS

APPLICATIONS

For heavy duty chiselling, channelling, and demolition tasks in concrete, stone (medium hardness), floor and wall tiles, general masonry and mortar.

FEATURES

DeWALT has a wide range of chisels covering most common applications. Specially toughened steel and micro-processor controlled heat treatment ensures consistent tough bits with long life.

SINGLE PACKS

Cat. No.	Description	Width mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT6820-QZ	Pointed	-	300	1	1	5011402378067
DT6822-QZ	Flat	25	300	1	1	5011402378074
DT6824-QZ	Flat	50	360	1	1	5011402378128
DT6826-QZ	Hollow/Gouge	26	300	1	1	5011402378098
DT6834-QZ	Tile Chisel	80	300	1	1	5035048034231
DT8090-QZ	Clay Spade	110	400	1	1	5035048034514
DT8091-QZ	Asphalt Cutter	90	400	1	1	5035048034521

19MM HEX CHISELS

APPLICATIONS

- For heavy duty chiselling, channelling, and demolition tasks in concrete, stone (medium hardness), floor and wall tiles, general masonry and mortar.

SINGLE PACKS

Cat. No.	Description	Width mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT6940-QZ	Pointed	-	400	1	1	5035048025031
DT6942-QZ	Flat	25	400	1	1	5035048025055
DT6947-QZ	Clay Spade	115	400	1	1	5035048058893
DT6948-QZ	Asphalt Cutter	90	400	1	1	5035048058909

28MM PAVEMENT BREAKER CHISELS

APPLICATIONS

- Heavy duty breaking of concrete, asphalt & stone.
- Heavy duty tamping tasks and earth rod driving.

SINGLE PACKS

Cat. No.	Description	Width mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT6927-QZ	Bull point	-	500	1	1	5035048070505
DT6929-QZ	Cold Chisel	32	500	1	1	5035048070529
DT6934-QZ	Asphalt Cutter	115	430	1	1	5035048070550

ADAPTOR – SDS-PLUS

APPLICATIONS

- Allows use of round shank drill bits in SDS-Plus fitment hammers. USE IN ROTARY MODE ONLY.

SINGLE PACKS

Cat. No.	Description	Pack Qty.	M.O.Q.	Barcode
DT7030-QZ	SDS-Plus – 1/2" x 20 UNF Chuck adaptor	1	1	5011402371419


DRIVE ADAPTORS

APPLICATIONS

- Allows interchangeability between tool & hammer bit fitments.

SINGLE PACKS

Cat. No.	Description	Pack Qty.	M.O.Q.	Barcode
DT6830-QZ	SDS-Max to SDS-Plus	1	1	5011402378135

HSS-CO EXTREME DeWALT® COBALT DRILL BITS

APPLICATIONS


- Suitable for portable or stationary drilling of high alloy content steels and metals with a tensile strength up to 1100N/mm² e.g. heat and acid proof steel, cast iron, bronze, welded seams, stainless and chrome nickel steels.

FEATURES

- Faster drilling - up to 4x faster than standard HSS-R drill bits.
- Increased durability - up to 50% stronger than standard HSS-R drill bits.
- Cleaner, more accurate, burr-free holes due to recessed cutting wings.
- Non slip shank with 3 flats eliminates slipping in the chuck (diameters 5.0mm and above only).
- 5% cobalt alloyed High Speed Steel for stability at high temperatures when drilling tough materials.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT5404-QZ	2.5	57	30	2	1	5011402375936
DT5405-QZ	3	61	33	2	1	5011402375950
DT5409-QZ	4	75	43	2	1	5011402375998
DT5412-QZ	4.5	80	47	1	1	5011402376018
DT5414-QZ	5	86	52	1	1	5011402376032
DT5415-QZ	5.5	93	57	1	1	5011402376056
DT5416-QZ	6	93	57	1	1	5011402376070
DT5417-QZ	6.5	101	63	1	1	5011402376094
DT5419-QZ	8	117	75	1	1	5011402376131
DT5422-QZ	10	133	87	1	1	5011402376179
DT5426-QZ	12	151	101	1	1	5011402376216
DT5427-QZ	13	151	101	1	1	5011402376230


EXTREME DeWALT® IMPACT DRILL BITS

FEATURES

- Full range of metal drill bits designed and optimised for use in an impact driver.
- Unique tip design eliminates walking and increases drilling speed.
- Single piece design, optimised flute angle and hardening process deliver extreme life in impact driver applications.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT50600-QZ	3	64	26	1	1	5035048081723
DT50601-QZ	3.2	67	29	1	1	5035048081730
DT50603-QZ	4	71	30	1	1	5035048081754
DT50605-QZ	4.5	75	31	1	1	5035048081778
DT50607-QZ	5	78	35	1	1	5035048081792
DT50608-QZ	5.5	78	35	1	1	5035048081808
DT50609-QZ	6	80	37	1	1	5035048081815
DT50610-QZ	6.5	81	38	1	1	5035048081822
DT50613-QZ	8	102	50	1	1	5035048081853
DT50614-QZ	8.5	102	50	1	1	5035048081860
DT50616-QZ	10	102	50	1	1	5035048081884
DT50618-QZ	12	102	50	1	1	5035048081907
DT50619-QZ	13	102	50	1	1	5035048081914



EXTREME DeWALT® 2 METAL DRILL BITS

APPLICATIONS

- Suitable for portable drilling of steel, alloyed and non-alloyed up to 900 N/mm².
- For drilling sheet or thin materials (suitable for use in wood and plastics).

FEATURES

- Faster drilling - up to 4x faster than standard HSS-R drill bits.
- Increased durability - up to 50% stronger than standard HSS-R drill bits.
- Cleaner, more accurate, burr-free holes due to recessed cutting wings.
- Non-slip shank with 3 flats eliminates slipping in the chuck (diameters 5.0mm and above only).

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Working Length mm	Pack Qty.	M.O.Q.	Barcode
DT5034-QZ	1	34	12	2	1	5035048034769
DT5035-QZ	1.5	40	18	2	1	5035048034774
DT5036-QZ	2	49	24	2	1	5035048034781
DT5037-QZ	2.5	57	30	2	1	5035048034798
DT5038-QZ	3	61	33	2	1	5035048034804
DT5039-QZ	3.2	65	36	2	1	5035048034811
DT5041-QZ	3.5	70	39	2	1	5035048034835
DT5042-QZ	4	75	43	2	1	5035048034842
DT5043-QZ	4.2	75	43	1	1	5035048034859
DT5044-QZ	4.5	80	46	1	1	5035048034866
DT5046-QZ	5	86	46	1	1	5035048034880
DT5047-QZ	5.5	93	57	1	1	5035048034897
DT5048-QZ	6	93	57	1	1	5035048034903
DT5049-QZ	6.5	101	58	1	1	5035048034910
DT5050-QZ	7	109	66	1	1	5035048034927
DT5051-QZ	7.5	109	66	1	1	5035048034934
DT5052-QZ	8	117	72	1	1	5035048034941
DT5053-QZ	8.5	117	72	1	1	5035048034958
DT5054-QZ	9	125	78	1	1	5035048034965
DT5055-QZ	9.5	125	78	1	1	5035048034972
DT5056-QZ	10	133	84	1	1	5035048034989
DT5057-QZ	10.5	133	84	1	1	5035048034996
DT5058-QZ	11	142	91	1	1	5035048052006
DT5059-QZ	11.5	142	91	1	1	5035048052013
DT5060-QZ	12	151	98	1	1	5035048052020
DT5061-QZ	12.5	151	98	1	1	5035048052037
DT5062-QZ	13	151	98	1	1	5035048052044


EXTREME DeWALT® IMPACT FLATWOOD DRILL BITS

APPLICATIONS


- For the rapid drilling of holes in wood.
- Suitable for natural hard and soft wood, chipboard and other man made materials.
- Ideal for door locks, mortising, electrical and plumbing work.

FEATURES

- Extra thick robust steel shank for outstanding durability and bit life.
- Chamfered outer cutting spurs for clean, very fast drilling and extended drilling life.
- Precision ground central point with optimised design for faster material penetration and increased drilling speed.

SINGLE PACKS

Cat. No.	Diameter mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT4762-QZ	10	152	1	1	5035048072950
DT4763-QZ	12	152	1	1	503548072967
DT4764-QZ	13	152	1	1	5035048072974
DT4765-QZ	14	152	1	1	5035048072981
DT4766-QZ	16	152	1	1	5035048072998
DT4767-QZ	18	152	1	1	5035048073001
DT4768-QZ	20	152	1	1	5035048073018
DT4769-QZ	22	152	1	1	5035048073025
DT4770-QZ	24	152	1	1	5035048073032
DT4771-QZ	25	152	1	1	5035048073049
DT4772-QZ	26	152	1	1	5035048073056
DT4773-QZ	28	152	1	1	5035048073063
DT4774-QZ	30	152	1	1	5035048073070
DT4775-QZ	32	152	1	1	5035048073087
DT4776-QZ	35	152	1	1	5035048073094
DT4777-QZ	38	152	1	1	5035048073100
DT4778-QZ	40	152	1	1	5035048073117

EXTREME DeWALT® IMPACT HOLESAWS

APPLICATIONS

- Ideal for cutting holes in thin metals, plastics and fibreglass board.
- For use with all Impact drivers.

FEATURES

- Optimised tooth design for faster drilling and more holes per charge.
- Thin walled design for optimum efficiency in cutting thin materials.
- Durable hex shank designed to fit all impact drivers.
- Ejection spring for easy plug removal.

SINGLE PACKS

Cat. No.	Diameter mm	Depth of Cut mm	Pack Qty.	M.O.Q.	Barcode
DT8253-QZ	19	5	1	1	5035048079959
DT8254-QZ	22	5	1	1	5035048079966
DT8255-QZ	25	5	1	1	5035048079973
DT8256-QZ	29	5	1	1	5035048079980
DT8257-QZ	32	5	1	1	5035048079997
DT8258-QZ	35	5	1	1	5035048080009
DT8259-QZ	38	5	1	1	5035048080016



EXTREME DeWALT® IMPACT SCREWDRIVER BITS


APPLICATIONS	FEATURES
<ul style="list-style-type: none"> For all heavy duty screwdriving applications. 	<ul style="list-style-type: none"> Durable hex shank designed to fit all impact drivers. Full hex body design for increased strength and life. Optimised tip design for reduced cam out. Heat treated body for increased durability.

EXTREME DeWALT® IMPACT BITS FOR POZIDRIV SCREWS

Cat. No.	Size	Description	Pack Qty.	M.O.Q.	Barcode
DT7386-QZ	Pz1	25mm Impact bit	5	1	5035048082201
DT7387-QZ	Pz2	25mm Impact bit	5	1	5035048082218
DT7390-QZ	Pz1	50mm Impact bit	5	1	5035048082249
DT7391-QZ	Pz2	50mm Impact bit	5	1	5035048082256

EXTREME DeWALT® IMPACT BITS FOR PHILLIPS SCREWS

Cat. No.	Size	Description	Pack Qty.	M.O.Q.	Barcode
DT7993-QZ	Ph1	25mm Impact bit	5	1	5035048082270
DT7994-QZ	Ph2	25mm Impact bit	5	1	5035048082287
DT7995-QZ	Ph3	25mm Impact bit	5	1	5035048082294
DT7997-QZ	Ph1	50mm Impact bit	5	1	5035048082317
DT7998-QZ	Ph2	50mm Impact bit	5	1	5035048082324
DT7999-QZ	Ph3	50mm Impact bit	5	1	5035048082331

SCREWDRIVING ADAPTORS

PILOT BITS, DRIVE GUIDES AND ADAPTORS

Cat. No.	Length mm	Description	Pack Qty.	M.O.Q.	Barcode
DT7508-QZ		1/2" SQ to 1/4" Hex Impact Wrench Adaptor	1	1	5035048082034
DT7512-QZ		1/4" hex to 1/2" square adaptor	1	1	5035048083055

APPLICATIONS

- For all screwdriving applications.

DRILLING – METAL

EXTREME DeWALT® 2 METAL DRILL BIT SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7920B-QZ	13	Metal drill bits 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm	1	5035048072189
DT7926-XJ	29	Metal drill bits 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13mm	1	5035048052341
DW1361	21	Medium tough case in blister with Titanium Pilot Point DeWALT Metal drill bits 21 Pieces IMPERIAL, Set Includes Sizes from 1/16 to 1/2 and Conversion Chart	1	885911113618
DW1369	29	Large tough case in blister with Titanium Pilot Point DeWALT Metal drill bits 29 Pieces IMPERIAL, Set Includes Sizes from 1/16 to 1/2 and Conversion Chart	1	885911113625
DW1263 G	14	Medium tough case in blister with Cobalt 5% Pilot Point DeWALT Metal drill bits 14 Pieces IMPERIAL, Set Includes Sizes (2) 1/16", 5/64", (2) 3/32", 7/64", (2) 1/8", 9/64", 5/32", 3/16", 7/32", 1/4" and Conversion Chart	1	028874112636

DRILLING – CARBIDE SDS-PLUS & XLR

SDS-PLUS EXTREME DeWALT® 2 DRILL BIT SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7937B-QZ	21	Medium tough case in blister with SDS EXTREME & Screwdriving DeWALT 21 Pieces Set Includes: SDS Plus Extreme DeWALT 2 Drill bit 5, 6, 6.5, 7, 8 Extreme Masonry Drill bits 4, 5, 2x6, 7, 2x8, Pz1x2, Pz2x2, Pz3, Ph1, Ph2x2, Ph3x25mm bits.	1	5035048056417
DT9700-QZ	4	5, 6, 8, 10mm	1	5035048056400
DT9701-QZ	7	5, 6x2, 8x2, 10, 12mm	1	5035048056417

DeWALT
ACCESSORIES

GUARANTEED TOUGH.®

SCREWDRIVING SETS – MIXED

SMALL & MEDIUM TOUGH CASE SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7928B-QZ	19	Masonry drill bits 4, 5, 5.5, 6, 7, 8mm. Ph2x4, Pz2x4, Ph2x50mm, Pz2x50mm, Slotted 5.5x50mm, Magnetic holder, Magnetic drive guide	1	5035048072264
DT7921B-QZ	13	Small tough case in blister with EXTREME DeWALT® 2 Metal drill bits 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm	1	5035048072196
DT7936B-QZ	39	Drill bits 5, 6, 6.5, 8, 10mm, Pz1x2, Pz2x2, Pz3, Ph1, Ph2x2, Ph3 25mm bits, T10, T15, T20, T25, T30, T40 25mm bits, S14.5mm, S15.5mm, S16.5mm 25mm bits, Pz1x2, Pz2x2, Pz3, Ph1x2, Ph2x2, Ph3 50mm bits, T20, T25, T30 70mm bits, Magnetic bit holder, 7mm socket driver, 8mm socket drive	1	5035048072264
DT7938B-QZ	36	Metal drill bits 1, 1.5, 2, 2.5, 3, 3.2, 3.3, 3.5, 4, 4.2, 4.5, 4.8, 5, 5.5, 6, 6.5, 7, 7.5, 8, 10, 12mm, Pz1, Pz2x2, Pz3, Ph1, Ph2, Ph3, T20, T25 25mm bits, Magnetic drive guide, Magnetic bit holder, T20, T25 70mm, Pz2 bits, Ph2 50mm bits	1	5035048072288

SCREWDRIVING SETS – MIXED

SCREWDRIVING SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7969-QZ	32	Medium tough case in blister with Screwdriving DeWALT 32 Pieces Set includes: 4 x Phillips (1 x #1, 1 x #3 and 2 x #2), 4 x 25mm Pazi (1 x #1, 1 x #3 and 2 x #2), 4 x 25mm slotted (0.5 x 3.0, 0.8 x 4.0, 0.8 x 5.0 and 1.2 x 6.5mm), 4 x 25mm Hex (3, 4, 5 and 6mm), 7 x 25mm Torx (T10, T15, T20, T25, T27, T30 and T40), 7 x 25mm Security Torx (T10H, T15H, T20H, T25H, T27H, T30H and T40H), 1 x 1/4" adaptor and 1 x 65mm quick-release adaptor.	1	05035048083741
DW2002B25	25	Small Tic Tac 25 Pieces with Screwdriving DeWALT #2 Phillips 25mm Screwdriver Bit Tip	1	02887736498
DW2097	14	Small Plastic box set 14 Pieces with Screwdriving DeWALT Set Includes:(6) #2 Phillips 1" Insert Bit Tips(2) #8 Slotted 1" Insert Bit Tips(1) #10 Slotted 1" Insert Bit Tip(3) #2 Square Recess 1" Insert Bit Tips(1) Compact Magnetic Drive Guide (1) Clear Magnetic Drive GuideBits come in a handy dispenser	1	028877472140
DW2174	18	Small tough case in blister with Screwdriving DeWALT 18 Piece Set Includes. Phillips - No.1 x 25.4mm length (x1) Phillips - No.2 x 25.4mm length (x2), No.2 x 50.8mm length (x5), No.2 x 88.9mm length (x2)Phillips - No.3 x 25.4mm (x1) Square - No.2 x 25.4mm length (x2), No.2 x 50.8mm length (x1), No.2 x 88.9mm length (x1) Slotted - No.8 x 25.4mm length (x2)Compact magnetic drive guide (x1) for fast, wobble free and slip free driving Heavy Duty Magnetic Keeps Bits in Place Bit Retention System Keeps Bits Secure	1	885911024631
DW2176	37	Small tough case in blister with Screwdriving DeWALT 37 Pieces Set includes: 1 #1 phillips screw bit, 18 #2 phillips screw bits(1"), 1 #2 phillips screw bit(2"), 1 #3 phillips screw bit, 1 #1 square bit, 6 #2 square bits, 1 #3 square bit, 1 #6 flat bit, 2 #8 flat bits, 1 #10 flat bit, 1 1/4" nut driver, 1 5/16" nut driver, 1 2" magnetic extension with guide sleeve, 1 4" magnetic extension with guide sleeve	1	885911024648
DW2520F	30	Medium tough case in blister with Rapid Load DeWALT 30 Pieces Drill bits & Screwdriving Set Includes Screw bits, Phillips 25mm 1#1, 3#2, 1#3, Phillips 50mm, 1#2, 1#3 Phillips 89mm 1#2.Square 25mm, 1#1, 2#2, 1#1.Square 50mm, 1#2.Square 89mm, 1#2. Flat Bits 25mm 1#8. Flat bits 50mm, 1#8.Torx bits, T25x 25mm, T25x50mm. Titanium drill bits, 1.6mm x 2, 2.4mm, 3.2mm, 4mm, 4.8mm. Nut Drivers 1/4, 5/16. Socket Adaptors Square 3/8.Magnetic Holder, Magnetic drive Guide, Magnetic bit tip Holder	1	885911244237

MAG BOX MAGNETIC SETS


APPLICATIONS	FEATURES
<ul style="list-style-type: none"> For all screwdriving applications. 	<ul style="list-style-type: none"> Compact design for easy storage and portability. High impact materials for optimum durability. High strength magnets and built in hooks for increased functionality and convenience.


MAG BOX MAGNETIC SETS

Cat. No.	Description	M.O.Q.	Barcode
DWMTIC15-XE	Small Magnetic case in blister with Rapid Load DeWALT 15 Pieces Screwdriving Set Includes: Screw bits, Phillips 25mm 4#2, 1#3, Phillips 50mm, 1#2, Square 25mm, 1#1, 1#2 Square 50mm, 1#2. Flat Bits 25mm 1#8. Torx bits, T25x 25mm. Nut Drivers 1/4, 5/16, 3/8. Magnetic Holder.	1	0885911216906

MODULAR ACCESSORY CASES


FEATURES
<ul style="list-style-type: none"> Made from tough, heavy-duty plastic, the full size modular accessory case can carry a very large selection of accessory items as well as providing plenty of storage space for other consumables such as plugs and fixings.


MODULAR ACCESSORY CASES

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT9281-QZ	65	Mini Mac Case DeWALT Masonry & Metal Drilling Kit Set 65 Pieces Set includes:Extreme Masonry (4, 5, 6x2, 7, 8x2 mm), Extreme 2 Metal (1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm). Screwdriver bits: 50mm P22, PH2, S15.5, S16.5, 25mm PH1, PH2x3, PH3, PZ1, PZ2x23, PZ3, T15, T20x2, T25x3, T30, T40, Magnetic bit holder and drive guide	1	5035048073308

LINEAR EDGE

LINEAR EDGE

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DW3791	8	Medium wallet case with DeWALT T-Shank Jig Saw Blade Set 8 Pieces Set Includes:Wood (HCS): Fast cutting, Clean Cutting, Fine Cut Smooth, Laminate Down Cutting, Trim CopingMetal Cutting :Aluminum/Fiberglass, (2)Metal cutting	1	028874037915



EXTREME DeWALT® IMPACT SETS



APPLICATIONS	FEATURES
<ul style="list-style-type: none"> For all heavy duty screwdriving applications. 	<ul style="list-style-type: none"> Durable hex shank designed to fit all impact drivers. Full hex body design for increased strength and life. Optimised tip design for reduced cam out.

EXTREME DeWALT® IMPACT SETS

Cat. No.	Description	Pack Qty.	M.O.Q.	Barcode
DT70501B-QZ	29pc Impact Screwdriving set	29	1	5035048082591
DT70502B-QZ	26pc Impact Drill Drive set – PH/PZ	29	1	5035048082607
DT70503B-QZ	26pc Impact Drill Drive set – TX	29	1	5035048082614
DW2180	35pc Impact Screwdriving Set	35	1	885911216951

IMPACT TIC TAC SCREWDRIVER BIT SETS



APPLICATIONS	FEATURES
<ul style="list-style-type: none"> For all heavy duty screwdriving applications. 	<ul style="list-style-type: none"> Flip box storage container. Professional screwdriver bits.

TIC TAC SCREWDRIVER BIT SETS

Cat. No.	Description	M.O.Q.	Barcode
DT70526	25 x PH2 25mm Bits Impact	1	5035048098950

IMPACT RATED SOCKET SETS



IMPACT RATED SOCKET SETS

Cat. No.	Pieces	Description	M.O.Q.	Barcode
DT7507-QZ	9	Impact Socket Set (10, 13, 15, 17, 19, 22, 24, 27mm & 1/4" to 1/2" Adaptor)	1	5035048078631



CIRCULAR SAW BLADES

More than 70 years of engineering expertise and innovation has been invested in the development of the latest circular saw blades from DeWALT. Manufactured from premium materials, their combination of precision, accuracy, smooth cut finish and durability delivers outstanding performance across a wide range of applications to make them the ideal choice for the professional user.

GRIND GEOMETRY



FLAT TOP GRIND (FT)
Teeth ground flat across top with 0 degree bevel. Best for ripping and general purpose, where quality of finish is less important than cut force.



ALTERNATE TOP BEVEL (ATB)
Teeth where the top bevel alternates from left to right, with bevel angle ranging 10 to 25 degrees. Ideal for cross cutting in hard and softwoods and general purpose woodcutting.



TRIPLE CHIP GRIND (TCG)
Flat top teeth alternate with slightly trapezoidal teeth that make a narrower cut, to prevent chipping brittle materials such as laminates.



HOLLOW GROUND (HG)
Very sharp edges designed to leave a chip-free finish - top and bottom. Ideal for cutting double sided composite board, eg. melamine.

APPLICATIONS



FAST RIP
Blades designed for fast rip of soft and hard natural wood. Ideal for pre-sizing applications ATB grind geometry, low tooth count and aggressive rake angles.



GENERAL PURPOSE & CROSS CUT
For all purpose rip and cross cutting in natural wood, plywood, laminates and particle board ATB grind geometry, medium tooth count and positive rake angles allow the blades to cut at higher feed speeds.



FINE FINISH & CROSS CUT
For smooth cross cuts in plywood, softwood, and all hardwoods ATB grind geometry, high tooth count and tuned grinding angles give excellent surface finish.



EXTRA FINE FINISH
Blades designed for EXTRA fine cuts in plywood, veneers, laminates and plastics. Blades are tuned to avoid breakout on laminate materials TCG grind geometry gives excellent surface finish on workpiece.



ALUMINIUM CUTTING
Blades optimised for cutting in Aluminium. TCG grind geometry gives clean and accurate finish on workpiece.

CORDLESS CIRCULAR SAW BLADES



FEATURES

- Heavy duty tungsten carbide tips maintain cutting edge for longer blade life.
- Thin kerf blade design - yields more cuts per charge by minimising battery drain.
- Triple action sharpening process which grinds the tip to a razor sharp edge for a smooth finish.
- Specifically designed for use with DeWALT Cordless Trimsaws. The range comprises of blades for cutting wood and for cutting plastic & non-ferrous metals.



CORDLESS CIRCULAR SAW BLADES

Cat. No.	Diameter	Bore mm	Additional Insert Ring mm	Teeth	Material	Class	Grind
DW9052	136mm	10		30	Aluminium		TCG
DW9054	136mm	10		24	Wood	Smooth	ATB
DW9152	165mm	16		36	Aluminium		FTG
DT1207-QZ	165mm	20		24	Wood	Framing	ATB
DT1212-QZ	140mm	20		30	Metal		MTCG
DW9155	165mm	16		18	Wood	Fast Cut	ATB

ALUMINIUM BLADES



APPLICATIONS

- Non-ferrous metal
- Solid surface
- Wood Laminates

FEATURES

- Reduced push force required by the user.
- Cuts straight to reduce binding.
- Teeth stay sharper longer with reduced breakage.



ALUMINIUM BLADES

Cat. No.	Diameter	Bore mm	Additional Insert Ring mm	Teeth	Material	Class	Grind
DW03220-XE	254mm	30	25.4mm	100	Aluminium		TCG
DW03240-XE	305mm	30	25.4mm	100	Aluminium		TCG

METAL CUTTING BLADES

APPLICATIONS

- Designed to cut unhardened mild steel with low RPM Dry-cut saws.



FOR USE EXCLUSIVELY FOR LOW RPM DRY-CUT SAWS

Cat. No.	Diameter	Bore mm	Additional Insert Ring mm	Teeth	Material	Class	Grind
DW7745	355mm	25		90	Metal	Metal	MATB
DW7747	355mm	25		70	Metal	Metal	MATB

CONSTRUCTION PORTABLE CIRCULAR SAW BLADES

FEATURES

- Precision ground cutting angles for excellent blade sharpness and faster cutting.
- "K20" extra robust carbide and unique wedge shoulder design for greater durability.
- Thick steel plate hard body for professional quality.



FOR CONSTRUCTION MATERIALS

Cat. No.	Diameter	Bore mm	Additional Insert Ring mm	Teeth	Material	Class	Grind
DW3173A	184mm	20	16	20	Wood	MULTI	ATB
DT1214-QZ	184mm	20	16	24	Wood	MULTI	TCT-HM
DT1215-QZ	184mm	20	16	36	Wood	MULTI	TCT-HM
DW3184A	210mm	25	16	40	Wood	MULTI	ATB
DW3188A	210mm	25	16	24	Wood	MULTI	ATB
DT4286-QZ	216mm	30		80	Alu/Wood		TCG
DT1216-QZ	235mm	25.4	25/20/16	24	Wood	MULTI	ATB
DT4321-QZ	250mm	30	25	30	Wood	MULTI	ATB
DT4354-QZ	250mm	30	25	80	Wood	MULTI	ATB
DT1182-QZ	254mm	30	25/20/16	60	Wood	MULTI	ATB
DW3123	305mm	25		32	Wood	MULTI	ATB
DT1183-QZ	305mm	30	25/20/16	60	Wood	MULTI	ATB
DT1184-QZ	305mm	30	25/20/16	80	Wood	MULTI	ATB

PRECISION TRIM SAW BLADES


EXTREME
DEWALT

FEATURES

- Exclusive plate technology
- Improved cut performance and reduced vibration
- Face Grind for clean, precise cuts
- Premium carbide 2x longer carbide than DeWalt Construction Series



FOR USE ON PLUNGE SAWS

Cat. No.	Diameter	Bore mm	Additional Insert Ring mm	Teeth	Material	Class	Grind
DT1040-QZ	254mm	30	25/20/16	60	Wood	Smooth	ATTB
DT1041-QZ	254mm	30	25/20/16	80	Wood	Smooth	ATTB
DT1042-QZ	305mm	30	25/20/16	60	Wood	Smooth	ATTB
DT1043-QZ	305mm	30	25/20/16	80	Wood	Smooth	ATTB

XPC WOOD CUTTING BLADES


FEATURES

- Unique jigsaw blade solution for ultimate control and accuracy of cut, even on the tightest of corners.
- New optimised tooth angle provides long life and clean tear-free cuts at high speed in all wood materials.
- Plunge Point tip design for easy plunge cutting with no 'kick-back' in all wood materials.
- Extra long life bi-metal blades, up to twice the number of cuts of standard HCS blades.



T-SHANK


Cat. No.	Pieces	Applications	Overall Length mm	Working Length mm	Tooth Pitch mm	Max DOC mm	Bosch Reference	Barcode
DT2211-QZ	5	For coarse accurate cutting in wood, chipboard, plywood, laminates and plastic up to 60mm thick	100	75	3.1	60	T111C	5035048074992
DT2213-QZ	5	For fast accurate cutting in wood, chipboard, plywood, laminates and plastic up to 60mm thick	100	75	4.2	60	T144D	5035048074992

WOOD CUTTING BLADES

FEATURES

- DeWalt HCS jigsaw blades are engineered to deliver a quality cut in a variety of materials, including wood, laminates and plastics.
- Made from high carbon steel.
- For use in soft materials such as wood, laminates, plywood, chipboard and plastics.

T-SHANK

Cat. No.	Pieces	Applications	Overall Length mm	Working Length mm	Tooth Pitch mm	Max DOC mm	Bosch Reference	Barcode
DT2053-QZ	5	For wood & laminates – downcutter for 'splinter free' cuts	100	73	2.5	40	T101BR	5035048060926
DT2165-QZ	5	For straight, fine cuts in wood, chipboard, plywood, laminated chipboard & plastic up to 30mm thick	100	73	2.5	30	T101B	5035048033135
DT2168-QZ	5	For fine, curve cutting in wood, chipboard, plywood, laminated chipboard & plastic up to 30mm thick	76	47	1.4	30	T101AO	5305048033234
DT2049-QZ	5	For clean extra straight cutting in wood and chipboard up to 60mm thick. (Extra thick blade)	100	68	4	60	T101DP	5035048060889
DT2051-QZ	5	Wood & plywood, chip & fibreboard – fast/rough cutting up to 85mm thick	132	100	4	85	T301DL	5035048060902
DT2169-QZ	5	For fast, straight cuts in wood & chipboard up to 100mm thick.	152	116	4	100	T344D	5035048033241
DT2057-QZ	5	For wood, chipboard & fibreboards up to 65mm thick. Progressor blade for fast cutting in different material thicknesses	116	91	2-3	65	T234X	5035048060964
DT2167-QZ	5	For fast, rough cuts in thick construction timber up to 120mm thick	180	155	4	120	T744D	5035048014455
DW3791	8	Medium wallet case with DeWalt T-Shank Jig Saw Blade Set 8 Pieces – Set Includes: Wood (HCS): Fast cutting, Clean Cutting, Fine Cut Smooth, Laminate Down Cutting, Trim Coping Metal Cutting :Aluminum/Fiberglass, (2)Metal cutting						028874037915

METAL & MASONRY CUTTING BLADES

FEATURES

- DeWALT HSS jigsaw blades are engineered to deliver a quality cut in a variety of ferrous and non-ferrous materials.
- Fully hardened high speed steel for increased durability.
- For use in aluminium, ferrous and non-ferrous materials.

T-SHANK

Cat. No.	Pieces	Applications	Overall Length mm	Working Length mm	Tooth Pitch mm	Max DOC mm	Bosch Reference	Barcode
DT2160-QZ	5	For straight cuts in thin metal, non-ferrous metal, aluminium & sheet metal from 1.5 - 4mm thick	76	50	1.2	4	T118A	5035048033050
DT2161-QZ	5	For straight cuts in thick metal, non-ferrous metal & aluminium from 2.5 - 6mm thick	76	50	2	6	T118B	5035048033067
DT2162-QZ	5	For straight cuts in very thin metal, non-ferrous metal & aluminium from 0.8 - 2mm thick	76	50	0.7	2	T118G	5035048033074
DT2085-QZ	5	For straight cuts in thin metal, non-ferrous metal (1.5 - 3mm) and aluminium up to 65mm thick	132	108	1.2	3	T318A	5035048070581
DW3762-5	5	Laminate Down Cutting 10TPI	101					028874037625
DW3770-5	5	Metal 14TPI	76					028874037700
DW3774-5	5	Metal 18TPI	76					028874037745
DW3776-5	5	Metal 24TPI	76					028874037769

MASONRY CUTTING BLADES

Cat. No.	Pieces	Applications	Overall Length mm	Working Length mm	Tooth Pitch mm	Max DOC mm	Bosch Reference	Barcode
DW3768-5	5	Masonry	76					028874037687

WOOD CUTTING BLADES

APPLICATIONS

- Blades available for almost all materials and applications.

FEATURES

- Bi-metal construction combining HCS and HSS for increased flexibility and durability.
- Tough cutting edge made from M2 High Speed Steel.
- Raker tooth pitch to maximise blade durability.
- Universal 1/2" (13mm) shank suitable for DeWALT, Bosch, Hitachi, Flex, Makita, Metabo, Skil.
- New "Plunge Point" tip for fast and accurate plunge cutting into all wood materials.

BI-METAL

Cat. No.	Description	MOQ	Pack Qty	Barcode
DW4802	52mm x 6TPI Taper	1	5	028874038028
DW4803	228mm x 6TPI Taper	1	5	028874038035
DW4804	340mm x 5/8TPI Taper	1	5	028874038042
DW4849	340mm x 6TPI Taper	1	5	028874048492
DW4806	52mm x 10TPI Straight	1	5	028874038066

METAL CUTTING BLADES

APPLICATIONS

- Blades available for almost all materials and applications.

FEATURES

- Bi-metal construction combining HCS and HSS for increased flexibility and durability.
- Tough cutting edge made from M2 High Speed Steel.
- Raker tooth pitch to maximise blade durability.
- Universal 1/2" (13mm) shank suitable for DeWALT, Bosch, Hitachi, Flex, Makita, Metabo, Skil.

BI-METAL

Cat. No.	Description	MOQ	Pack Qty	Barcode
DW4807	101mm x 14TPI Straight x 5 Units	1	5	028874038073
DW4808	152mm x 14TPI Straight x 5 Units	1	5	028874038080
DW4809	203mm x 14TPI Straight x 5 Units	1	5	028874038097
DW4811	152mm x 18TPI Straight x 5 Units	1	5	028874038110
DW4813	152mm x 24TPI Straight x 5 Units	1	5	028874038134


2X LIFE-HARD METAL

Cat. No.	Description	MOQ	Pack Qty	Barcode
DWA4186	152mm x 14/18TPI 2X x 5 Units (Premium)	1	5	885911254519
DWA4188	203mm x 14TPI Straight x 5 Units	1	5	885911254557

RECIPROCATING SAW BLADES

Blades available for almost all materials and applications.
The range of hard metal reciprocating blades feature:

EXTREME

- Longer life - Proprietary coatings, steel construction, tooth geometry and blade thickness help to reduce heat build up.
- Outstanding durability - thick and wide blade.



DRYWALL CUTTING BLADES

FEATURES

- Longer blade life, 2x life.
- Outstanding durability.
- Efficient cutting performance.

2X LIFE - HARD METAL

Cat. No.	Description	MOQ	Pack Qty	Barcode
DW4851	6" x 6TPI Taper x 1 Unit	1	5	028874048515

DEMOLITION BLADES

EXTREME

APPLICATIONS

- Ideal for extreme applications and demolition tasks.
- For cutting hard and soft wood including wood with nails.
- Range also includes metal and plastic cutting (sheet metals, profiles and tubes).

FEATURES

- Wider blade body gives greater stability during cutting.
- Thicker blade ensures greater strength.
- Bi-metal construction gives strong, flexible blade and hardened teeth.
- New "Plunge Point" tip for fast and accurate plunge cutting into all wood materials.

BI-METAL

Cat. No.	Description	MOQ	Pack Qty	Barcode
DT2314L-QZ	305mm 2X Recip Blade 6TPI Wood + nails	1	5	5035048088647
DT2300L-QZ	152mm 2X Recip Blade 6TPI Wood + nails	1	5	5035048088661
DT2308L-QZ	228mm 2X Recip Blade 10TPI General purpose	1	5	5035048088616

RECIPROCATING SAW BLADE SETS

RECIPROCATING SAW BLADE SETS

Cat. No.	Pieces	Description	Barcode
DT2440-QZ	6	DT2307 x 2, DT2349 x 2, DT2353 x 2	5035048072912

PLANNER BLADES



Cat. No.	Description	Pack Qty.	M.O.Q.	Barcode
DT3901-QZ	80mm TCT reversible planer blades	1 pair	1	5035048059456

FOR USE WITH DW677, DW680K AND D26500K

Cat. No.	Description	Pack Qty.	M.O.Q.	Barcode
DT3906-QZ	82mm TCT reversible planer blades	1 pair	1	5011402381869

DEWALT® ABRASIVE PRODUCT IDENTIFICATION

DEWALT® utilises an industry recognised colour coding and identification system to help users identify the right bonded abrasive wheel for their application. There are also several other key identifiers to look for on a wheel; RPM's, wheel size, thickness and arbor size to ensure the correct product is used.

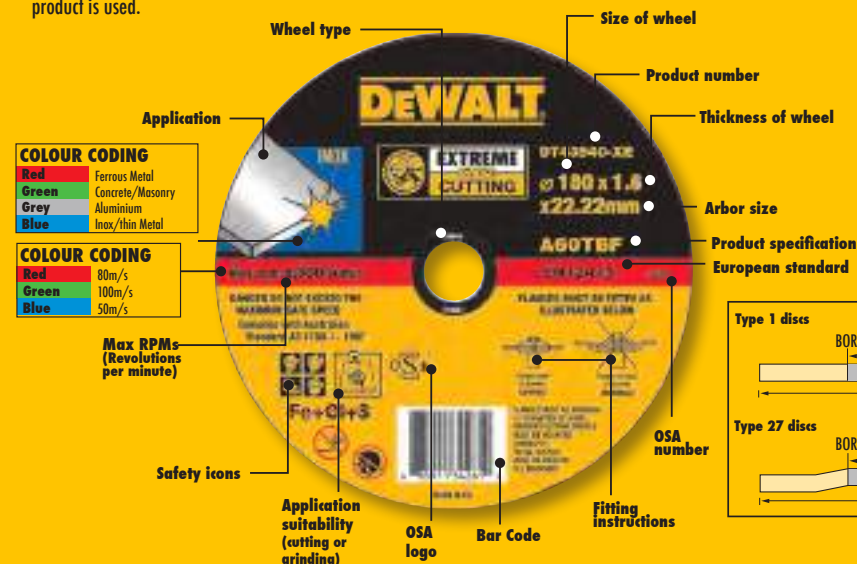
METAL CUTTING DISKS

APPLICATIONS

- Cutting ferrous metals such as steel, iron, rebar and welds.

FEATURES

- Professional grade aluminium oxide.
- Premium resin bond.
- Reinforced fibre glass


BI-METAL

Cat No.	Diameter mm	Application	Thickness mm	Bore size mm	Pack Qty	Barcode
DWA4520FA-XE	100	Metal	2.5	16	25	885911295062
DWA4521FA-XE	115	Metal	2.5	22.22	10	885911342636
DWA4522FA-XE	125	Metal	2.5	22.22	25	885911301183
DWA4524FA-XE	180	Metal	2.5	22.22	10	885911295086
DWA4525FA-XE	230	Metal	2.5	22.22	10	885911301190

EXTREME METAL CUTTING DISCS
EXTREME

APPLICATIONS

- For cutting all types of steel.

FEATURES

- Industrial grade aluminium oxide formulation for high durability, aggressive cutting action and long life.
- Reinforced fibre glass.
- Superior resin bond.


BI-METAL

Cat No.	Diameter mm	Application	Thickness mm	Bore size mm	Pack Qty	Barcode
DT43140-XE	100	INOX	1.2	16	25	885911343206
DT43240-XE	115	INOX	1.2	22.22	25	885911343213
DT43340-XE	125	INOX	1.2	22.22	25	885911343220
DT43540-XE	180	INOX	1.6	22.22	25	885911342612


METAL GRINDING DISCS

APPLICATIONS

- For general metal grinding applications on ferrous and non-ferrous metals, including weld and surface preparation.

FEATURES

- Professional grade aluminium oxide.
- Reinforced fibre glass.
- Premium resin bond.


BI-METAL

Cat No.	Diameter mm	Application	Thickness mm	Bore size mm	Pack Qty	Barcode
DWA4500-XE	100	Metal	6	16	25	885911266307
DW4541A-XE	115	Metal	6	22.22	10	885911342629
DW4543A-XE	125	Metal	6	22.22	25	885911295529
DW4547A-XE	180	Metal	6	22.22	10	885911295543
DW4549A-XE	230	Metal	6	22.22	10	885911295550


CHOP SAW WHEEL – FOR METAL

APPLICATIONS

- Cutting ferrous metals such as steel, iron, rebar and welds.

FEATURES

- Industrial grade aluminium oxide.
- Reinforced fibre glass.
- Superior resin bond.


BI-METAL

Cat No.	Diameter mm	Application	Thickness mm	Bore size mm	Pack Qty	Barcode
DWA8011-XE	355	Metal	3	25.4	10	885911295505


EXTREME FLAP DISCS
EXTREME

APPLICATIONS

- For rust removal, grinding and cleaning metal.

FEATURES

- Tough durable zirconia grain.
- Very strong with very high removal rate.
- Low noise.
- Cool grinding.


BI-METAL

Cat No.	Description	Diameter mm	Grit size	Pack Qty	Barcode
DT30601-QZ	Type 27 Flat	115	40	10	5035048085622
DT30611-QZ	Type 27 Flat	115	60	10	5035048085639
DT30621-QZ	Type 27 Flat	115	80	10	5035048085646
DT30602-QZ	Type 27 Flat	125	40	10	5035048085653
DT30612-QZ	Type 27 Flat	125	60	10	5035048085660
DT30622-QZ	Type 27 Flat	125	80	10	5035048085677
DT30603-QZ	Type 27 Flat	180	40	10	5035048085684
DT30613-QZ	Type 27 Flat	180	60	10	5035048085691
DT30623-QZ	Type 27 Flat	180	80	10	5035048085707


ABRASIVES

APPLICATIONS

- Cuts concrete, rubber, non ferrous metals, fibreglass and soft materials without loading.

FEATURES

- 100x Life vs standard chop saw wheel.
- Constant cutting capacity.
- Cuts metal with the speed of conventional abrasive.


BSL DIAMOND WHEEL – TO FIT D28710 / D28715

Cat. No.	Diameter mm	Thickness mm	Bore Size	Type	Application	M.O.Q	Barcode
DW8500	355	6	25.4	Flat	Chop Cutting	1	5035048083772

BACKING PADS

APPLICATIONS

- For use with angle grinder fibre discs and polishing bonnets.

FEATURES

- Thermoplastic backing pad supplied with flange locking nut.

BACKING PADS

Cat. No.	Diameter mm	Max Speed	Bore Size mm	Pack Qty.	M.O.Q.	Barcode
DT3567-QZ	180		M14	1	1	5035048083802
DT3569-QZ	180		M14	1	1	5035048083826

ANGLE GRINDER POLISHING BONNETS

APPLICATIONS

- High Speed polishing on a wide variety of surfaces e.g. unpainted metals and stone.

FEATURES

- Lambswool pile polishing bonnets.

ANGLE GRINDER POLISHING BONNETS

Cat. No.	Diameter mm	Pack Qty.	M.O.Q.	Barcode
DT3622-QZ	178	1	1	5035048059333
DT3568-QZ	180	1	1	5035048083819

NAILS



NAILS FOR CORDLESS 2ND FIX FINISHING NAILERS (16 GAUGE 20°) - TO FIT DC618

Cat. No.	Description	Type	Diameter mm	Length mm	Pack Qty.	M.O.Q.	Barcode
DT9901-QZ	Galvanised	Angled 20°	1.39 x 1.61	38	2500	1	5035048061657
DT9903-QZ	Galvanised	Angled 20°	1.39 x 1.61	50	2500	1	5035048061671
DT9904-QZ	Galvanised	Angled 20°	1.39 x 1.61	63	2500	1	5035048061688



OSCILLATING TOOLS



FITS

• DeWALT® BOSCH® FEIN®
MAKITA® MILWAUKEE®



OSCILLATING TOOLS ACCESSORIES

Item	Cat. No.	Description	M.O.Q.	Pack Qty.	Barcode
	DT20700-QZ	Sanding Platen	1	5	5035048099230
	DT20701-QZ	Wood with Nails Blade - 31.75mm x 41.28mm	1	5	5035048099247
	DT20702-QZ	Titanium Wood/Metal Blade - 44.45mm x 41.28mm	1	5	5035048099254
	DT20703-QZ	Hardwood Blade - 31.75mm x 66.68mm	1	5	5035048099261
	DT20704-QZ	Fastcut Wood Blade - 31.75mm x 41.28mm	1	5	5035048099278
	DT20705-QZ	Fastcut Wood Blade - 63.5mm x 41.28mm	1	5	5035048099285
	DT20706-QZ	Detail Blade - 0.375mm x 41.28mm	1	5	5035048099292
	DT20707-QZ	Titanium Metal Blade - 31.75mm x 41.28mm	1	5	5035048099308

FITS

• DeWALT® BOSCH® FEIN®
MAKITA® MILWAUKEE®



OSCILLATING TOOLS ACCESSORIES


Item	Cat. No.	Description	M.O.Q.	Pack Qty.	Barcode
	DT20708-QZ	Semicircle Blade - 114.3mm	1	5	5035048099309
	DT20709-QZ	Titanium Semicircle Blade - 114.3mm	1	5	5035048099322
	DT20710-QZ	Flush Cut Blade - 114.3mm	1	5	5035048099339
	DT20711-QZ	Titanium Flush Cut Blade - 114.3mm	1	5	5035048099346
	DT20712-QZ	Roofing Blade - 114.3mm	1	5	5035048099353
	DT20714-QZ	Rigid Scraper Blade	1	5	5035048099384
	DT20716-QZ	Flexible Scraper Blade	1	5	5035048099391
	DT20717-QZ	Carbide Grout Removal Blade - 3.175mm	1	5	5035048099407
	DT20718-QZ	Fastcut Carbide Grout Removal Blade - 4.76mm	1	5	5035048099414
	DT20719-QZ	Carbide Rasp	1	5	5035048099421
	DT20713-QZ	3 PC set DT20701-QZ, DT20706-QZ, DT20704-QZ	1	3	5035048099360
	DT20715-QZ	5 PC set DT20701-QZ, DT20706-QZ, DT20704-QZ, DT20714-QZ, DT20711-QZ	1	3	5035048099377




DT3090-QZ	40G
DT3091-QZ	60G
DT3092-QZ	80G
DT3093-QZ	120G
DT3094-QZ	180G
DT3095-QZ	240G



DT20700




93x93mm




TITANIUM
BiM



DT20707




30 x 43mm



MULTI-MATERIAL™



DT20712




100mm



ToughGrit
CARBIDE EDGE™



DT20719



93mm



		Adhesives Lacquers Sealants	Tile	Foam Insulation	Vinyl Flooring	Cardboard	Carpet	Asphalt Roofing Shingles	Metal	PVC	Drywall	Wood with Nails	Wood
Cat No.	DT20700									✓	✓		✓
	DT20701									✓	✓	✓	✓
	DT20702									✓	✓	✓	✓
	DT20703									✓	✓	✓	✓
	DT20704									✓	✓	✓	✓
	DT20705									✓	✓	✓	✓
	DT20706									✓	✓	✓	✓
	DT20707								✓	✓	✓	✓	✓
	DT20708									✓	✓	✓	✓
	DT20709									✓	✓	✓	✓
	DT20710									✓	✓	✓	✓
	DT20711									✓	✓	✓	✓
	DT20712									✓	✓	✓	✓
	DT20713									✓	✓	✓	✓
	DT20714									✓	✓	✓	✓
	DT20715									✓	✓	✓	✓
	DT20716									✓	✓	✓	✓
	DT20717									✓	✓	✓	✓
	DT20718									✓	✓	✓	✓
	DT20719									✓	✓	✓	✓

DeWALT®

SERVICE

DeWALT offers an outstanding guarantee for professional users of our power tools

30 DAY NO RISK SATISFACTION GUARANTEE

If you are not completely satisfied with the performance of your DeWALT product, simply return it to the point of purchase within 30 days for a full refund or exchange. Product must be complete as purchased and proof of purchase must be produced. Spare parts and Accessories are excluded unless failed under warranty.

1 YEAR FREE SERVICE CONTRACT

If you require maintenance or service for your DeWALT product within 12 months of purchase, you are entitled to one service free of charge, undertaken at an authorised DeWALT repair agent. Proof of purchase must be produced. Includes labour. Spare parts and Accessories are excluded, unless failed under warranty.

3 YEAR LIMITED WARRANTY

In the unlikely event that your DeWALT product becomes defective due to faulty materials or workmanship within 3 years of purchase, DeWALT guarantees to replace all defective parts free of charge or - at our discretion - replace the unit free of charge. In order to make a claim, you will need to submit proof of purchase to the seller or an authorised DeWALT repair agent.

This is provided that the product has not been misused and has been subject to fair wear and tear. Our warranty covers products purchased within ANZ from authorised distributors. Products purchased outside of, or parallel imported into Australia or New Zealand, are not covered under our local ANZ warranty.

Any attempt by anyone other than an authorised service repair agent to service a tool during the warranty period will invalidate the warranty for said tool.

For Full Terms and Conditions visit:
www.DeWALT.com.au / www.DeWALT.co.nz



DeWALT

SERVICE


- ★ **CONVENIENCE**
- ★ **SPEED**
- ★ **QUALITY**
- ★ **GENUINE PARTS**
- ★ **ONLINE SERVICE**

TO LOCATE YOUR NEAREST AUTHORISED SERVICE AGENT PLEASE VISIT:


www.2helpU.com

BATTERY MAINTENANCE


In order to get the best out of your DeWALT battery we recommend you follow these sample steps



Charge for a minimum 10hrs before use and refresh every week



Store battery pack at room temperature



Only use battery pack in temperatures between 4°C and 40°C



Do not overload your tool



Do not charge damaged batteries



Do not expose to water

1 How do battery packs fail?

Battery packs fail because of old age. Other failures include overheating, short circuit and damage due to sudden impact.

2 What can I do to get maximum use from my battery?

* Most DeWALT NiCd/NiMH chargers offer a 10 hour "refresh" program which should be used weekly.

* Do not overload your tool.

* Store your battery packs in dry conditions between 4 and 20°C

3 What is 'memory effect' and does it affect power tool batteries?

Memory can cause a loss of runtime. Memory is created from repetitive shallow discharges. Power Tools rarely see shallow discharges under the exact same load. Whilst NiCd and NiMH can suffer from this condition, Li-Ion does not.

4 Should a battery be discharged completely before being charged?

No power tool battery should be discharged completely before charging, this is more likely to permanently damage the battery pack than prolong the battery pack's life.

5 Can I use a DeWALT battery pack with the same voltage but different chemistry in my product?

A tool bought with a Li-Ion, NiCd or NiMH battery pack can be used with the other chemistries. It is best to check compatibility with your local dealer or DeWALT Service team.

6 Can I use a DeWALT battery pack with the same voltage but different capacity (Amp hours) rating in my product?

The capacity a battery has is relevant to the amount of run time you will receive from it, assuming that the voltage and battery style is the same and you have checked the chemistry, it will be compatible.

7 Can any DeWALT charger be used to charge any DeWALT battery?

No. Different chargers are suitable for use with different batteries check with your local dealer or DeWALT Service team if you are unsure.

When returning your tool for repairs please remember to bring a proof of purchase with you.

When returning your cordless tools for repairs, please ensure you bring back the battery and charger with the tool



SERVICE NOTES:

SERVICE NOTES:

www.2helpu.com

It takes only 3 clicks to access the latest DeWALT service information and technical data, available 24/7 with daily updates on new and existing products



On www.2helpu.com, we publish:


- The DeWALT authorized repair agents
- The latest information about our spare parts
- The drawings, exploded views and instructions manual of all DeWALT tools
- Our warranty policy
- FAQs

You can also email us directly via the 'contact us' section.
www.2helpu.com is also available from www.DeWALT.com – click on the 'service' tab

GENUINE PARTS

All our spare parts are genuine and therefore they:

- Are guaranteed to fit and work correctly
- Have the correct specification
 - Carbon brushes quality for optimum performance
 - Safety guards which meet safety standards
 - Grease and lubrication (longer life time)
- Meet standards and regulations
 - Machinery directives, CE, WEEE, REACH, RoHS, TUV, Kema etc standards

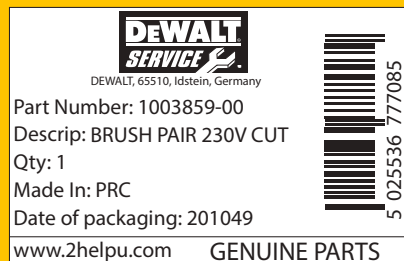

IN STORE MERCHANDISING AND DISPLAY SYSTEM

- **FLEXIBLE, MODULAR SYSTEM**
- **CLEAR PRODUCT DIFFERENTIATION AND COMMUNICATION**
- **STRONG DeWALT BRANDING**

Products sold as per dealer's valid price list. Product availability will vary store to store.

DeWALT is a member of EPTA

DeWALT reserves the right to revise product specifications at any time without notice.

WARNING: all warranties are country/region specific. Tools purchased e.g. in the USA and imported into ANZ, which are not compliant for that region, will not be supported/serviced in ANZ by DeWALT as a result.

Only approved ANZ tools are covered by an ANZ warranty.

GUARANTEED TOUGH, DeWALT EXTREME, DeWALT, EXTREME DeWALT, DeWALT EXTREME IMPACT, DeWALT GUARANTEED TOUGH, SERIES 20, SERIES 30, SERIES 40, SERIES 60, AVC, XRP, XPC, XLR, TOUGHSYSTEM, XR, XPS, ALLIGATOR and the yellow and black colour scheme for portable electric power tools are registered trademarks of The Black and Decker Corporation and Stanley Black & Decker Inc. The yellow and black colour scheme is used on DeWALT power tools and accessories as a trademark.



Registered Trade Marks of Robert Bosch GmbH. Torx® is a Registered Trade Mark of Acument Intellectual Properties, LLC.



GUARANTEED TOUGH.®

DeWALT AU
82 Taryn Drive, Epping, Victoria 3076
Telephone: 1800 338 002 | Fax: 1800 080 898

DeWALT NZ
39 Business Parade North, East Tamaki Heights, Auckland
Telephone: 0800 4782 6539 | Fax: 0800 2782 6539

DeWALT DEALER:

Printed August 2014

BOSTOCK & QUIROGA

www.DeWALT.com

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT reserves the right to revise product offerings & specifications at any time without notice.

MY DeWALT®